



Reach In Glass Door Coolers

Models RE-CN-0021-G-HC, 0041-G-HC, 0067-G-HC
Items 51024, 51026, 51028


Instruction Manual



STOP
DO NOT RETURN
THIS PRODUCT TO THE STORE

For questions or assistance with this product call OMCAN Toll Free: 1 800 465 0234
Customer Service
or
visit the Support section of www.omcan.com

Revised - 05/12/2023



Toll Free: 1-800-465-0234
Fax: 905-607-0234
Email: service@omcan.com
www.omcan.com



Table of Contents

Model RE-CN-0021-G-HC / Model RE-CN-0041-G-HC / Model RE-CN-0067-G-HC

Section	Page
Disclaimer -----	3
General Information -----	4 - 5
Safety and Warranty -----	5 - 7
Technical Specifications -----	7
Installation -----	7 - 8
Maintenance -----	9
Troubleshooting -----	10 - 11
Controller Instructions -----	12 - 14
Parts Breakdown -----	15 - 20
Electrical Schematics -----	21 - 23
Notes -----	24 - 26
Warranty Registration -----	27

Disclaimer

OMCAN IS NOT RESPONSIBLE FOR ANY DAMAGES DUE TO WATER LEAKS. WARRANTY FOR WATER LEAKS IS VOID IF THE AMBIENT ROOM TEMPERATURE EXCEEDS 75°F AND 55% RELATIVE HUMIDITY, AND THE APPLIANCE DRAIN IS NOT CONNECTED DIRECTLY TO A FLOOR DRAIN.

OMCAN N'EST PAS RESPONSABLE DES DOMMAGES DUS AUX FUITES D'EAU. LA GARANTIE POUR LES FUITES D'EAU EST ANNULÉE SI LA TEMPÉRATURE AMBIANTE DE LA PIÈCE DÉPASSE 75°F ET 55% D'HUMIDITÉ RELATIVE, ET SI LE DRAIN DE L'APPAREIL N'EST PAS RACCORDÉ DIRECTEMENT À UN DRAIN DE PLANCHER.

OMCAN NO SE HACE RESPONSABLE DE LOS DAÑOS CAUSADOS POR FUGAS DE AGUA. LA GARANTÍA POR FUGAS DE AGUA QUEDA ANULADA SI LA TEMPERATURA AMBIENTE SUPERA LOS 75°F Y EL 55% DE HUMEDAD RELATIVA, Y EL DESAGÜE DEL APARATO NO ESTÁ CONECTADO DIRECTAMENTE A UN DESAGÜE DE PISO.

General Information

Omcan Manufacturing and Distributing Company Inc., Food Machinery of America, Inc. dba Omcan and Omcan Inc. are not responsible for any harm or injury caused due to any person's improper or negligent use of this equipment. The product shall only be operated by someone over the age of 18, of sound mind, and not under the influence of any drugs or alcohol, who has been trained in the correct operation of this machine, and is wearing authorized, proper safety clothing. Any modification to the machine voids any warranty, and may cause harm to individuals using the machine or in the vicinity of the machine while in operation.

CHECK PACKAGE UPON ARRIVAL

Upon receipt of an Omcan shipment please inspect for external damage. If no damage is evident on the external packaging, open carton to ensure all ordered items are within the box, and there is no concealed damage to the machine. If the package has suffered rough handling, bumps or damage (visible or concealed), please note it on the bill of lading before accepting the delivery and contact Omcan within 24 hours, so we may initiate a claim with the carrier. A detailed report on the extent of the damage caused to the machine must be filled out within three days, from the delivery date shown in the shipping documents. Omcan has no recourse for damaged products that were shipped collect or third party.

Before operating any equipment, always read and familiarize yourself with all operation and safety instructions.

Omcan would like to thank you for purchasing this machine. It's of the utmost importance to save these instructions for future reference. Also save the original box and packaging for shipping the equipment if servicing or returning of the machine is required.

Omcan Fabrication et distribution Compagnie Limitée et Food Machinery d'Amérique, dba Omcan et Omcan Inc. ne sont pas responsables de tout dommage ou blessure causé du fait que toute personne ait utilisé cet équipement de façon irrégulière. Le produit ne doit être exploité que par quelqu'un de plus de 18 ans, sain d'esprit, et pas sous l'influence d'une drogue ou d'alcool, qui a été formé pour utiliser cette machine correctement, et est vêtu de vêtements de sécurité appropriés. Toute modification de la machine annule toute garantie, et peut causer un préjudice à des personnes utilisant la machine ou des personnes à proximité de la machine pendant son fonctionnement.

VÉRIFIEZ LE COLIS DÈS RÉCEPTION

Dès réception d'une expédition d'Omcan veuillez inspecter pour dommages externes. Si aucun dommage n'est visible sur l'emballage externe, ouvrez le carton afin de s'assurer que tous les éléments commandés sont dans la boîte, et il n'y a aucun dommage dissimulé à la machine. Si le colis n'a subi aucune mauvaises manipulations, de bosses ou de dommages (visible ou cachée), notez-le sur le bond de livraison avant d'accepter la livraison et contactez Omcan dans les 24 heures qui suivent, pour que nous puissions engager une réclamation auprès du transporteur. Un rapport détaillé sur l'étendue des dommages causés à la machine doit être rempli dans un délai de trois jours, à compter de la date de livraison indiquée dans les documents d'expédition. Omcan n'a aucun droit de recours pour les produits endommagés qui ont été expédiés ou cueilli par un tiers transporteur.



General Information

Avant d'utiliser n'importe quel équipement, toujours lire et vous familiariser avec toutes les opérations et les consignes de sécurité.

Omcan voudrais vous remercier d'avoir choisi cette machine. Il est primordial de conserver ces instructions pour une référence ultérieure. Également conservez la boîte originale et l'emballage pour l'expédition de l'équipement si l'entretien ou le retour de la machine est nécessaire.

Omcan Empresa De Fabricacion Y Distribucion Inc. Y Maquinaria De Alimentos De America, Inc. dba Omcan y Omcan Inc. no son responsables de ningun daño o perjuicio causado por cualquier persona inadecuada o el uso descuidado de este equipo. El producto solo podra ser operado por una persona mayor de 18 años, en su sano juicio y no bajo alguna influencia de droga o alcohol, y que este ha sido entrenado en el correcto funcionamiento de esta máquina, y ésta usando ropa apropiada y autorizada. Cualquier modificación a la máquina anula la garantía y puede causar daños a las personas usando la máquina mientras esta en el funcionamiento.

REVISE EL PAQUETE A SU LLEGADA

Tras la recepcion de un envio Omcan favor inspeccionar daños externos. Si no hay daños evidentes en el empaque exterior, Habra el carton para asegurarse que todos los articulos solicitados estén dentro de la caja y no encuentre daños ocultos en la máquina. Si el paquete ha sufrido un manejo de poco cuidado, golpes o daños (visible o oculto) por favor anote en la factura antes de aceptar la entrega y contacte Omcan dentro de las 24 horas, de modo que podamos iniciar una reclamación con la compañía. Un informe detallado sobre los daños causados a la máquina debe ser llenado en el plazo de tres días, desde la fecha de entrega que se muestra en los documentos de envío. Omcan no tiene ningun recurso por productos dañados que se enviaron a recoger por terceros.

Antes de utilizar cualquier equipo, siempre lea y familiarizarse con todas las instrucciones de funcionamiento y seguridad.

Omcan le gustaría darle las gracias por la compra de esta máquina. Es de la mayor importancia para salvar estas instrucciones para futuras consultas. Además, guarda la caja original y el embalaje para el envío del equipo si servicio técnico o devolución de la máquina que se requiere.

Safety and Warranty

Please pay close attention to the safety notices in this section. Disregarding these notices may lead to serious injury and/or damage to the unit.

ATTENTION

- To minimize shock and fire hazards, be sure not to overload outlet. Please designate one outlet for your unit.

Safety and Warranty

- Do not use extension cords.
- Do not put your hands under the unit when the units is required to be moved.
- When the unit is not in use for a long period of time, please unplug the unit from the outlet.
- After unplugging the unit, wait at least 10 minutes before re-plugging it. Failure to do so could cause damage to the compressor.

UNPLUG CORD

- To minimize shock and fire hazards, please do not plug or unplug the cord with wet hands.
- During maintenance and cleaning, please unplug the unit.

PROPER GROUNDING REQUIRED

- To minimize shock and fire hazards, make sure that the unit is properly grounded.

PROHIBITION

- Do not attempt to remove or repair any component unless instructed by factory.
- Make sure that the unit is not resting on or against the electrical cord and plug.
- To minimize personal injury, do not hang on the doors.
- Do not store any flammable and explosive gas or liquids inside the unit.
- Do not attempt to alter or tamper with the electrical cord.

RESIDENTIAL USERS: Vendor assumes no liability for parts or labor coverage for component failure or other damages resulting from installation in non-commercial or residential applications. The right is reserved to deny shipment for residential usage; if this occurs, you will be notified as soon as possible.

2 YEARS PARTS AND LABOUR / 5 YEARS PARTS ONLY ON COMPRESSOR WARRANTY

Within the warranty period, contact Omcan Inc. at 1-800-465-0234 to schedule an Omcan authorized service technician to repair the equipment locally.

Unauthorized maintenance will void the warranty. Warranty covers electrical and part failures, not improper use.

Please see <https://omcan.com/disclaimer> for complete info.

WARNING:

The packaging components are classified as normal solid urban waste and can therefore be disposed of without difficulty.



Safety and Warranty

In any case, for suitable recycling, we suggest disposing of the products separately (differentiated waste) according to the current norms.

DO NOT DISCARD ANY PACKAGING MATERIALS IN THE ENVIRONMENT!

Technical Specifications

Model	RE-CN-0021-G-HC	RE-CN-0041-G-HC	RE-CN-0067-G-HC
Net Volume	651.3 L / 23 cu.ft.	1330.9 L / 47 cu.ft.	2038.8 L / 72 cu.ft.
Temperature Range	0.5 - 5°C / 33 - 41°F		
Max Ambient Temp Rating	24°C / 75°F		
Refrigerant	R290		
Cooling System	Ventilated		
Power	1/5 HP	1/3 HP	3/4 HP
Electrical	110-120V / 60Hz / 1		
Current	3.6A	6.2A	8.5A
Number of Doors	1	2	3
Number of Shelves	3	6	9
Shelf Capacity	583 L / 20.6 cu.ft.	1169 L / 41.3 cu.ft.	1883 L / 66.5 cu.ft.
Exterior Dimensions	29" x 32.3" x 82.5" 736 x 818 x 2095mm	54" x 32.3" x 82.5" 1371 x 818 x 2095mm	80.9" x 32.2" x 82.5" 2054 x 818 x 2095mm
Interior Dimensions	24.4" x 27" x 53.5" 620 x 688 x 1360mm	49.4" x 27" x 53.5" 1255 x 688 x 1360mm	76.3" x 27" x 53.5" 1938 x 688 x 1360mm
Packaging Dimensions	34" x 30.3" x 84.4" 770 x 865 x 2145mm	34.6" x 56.5" x 84.4" 1435 x 880 x 2145mm	34.6" x 83.7" x 84.5" 2125 x 880 x 2145mm
Weight	302 lbs. / 137 kgs.	469.6 lbs. / 213 kgs.	615.1 lbs. / 279 kgs.
Packaging Weight	341.7 lbs. / 155 kgs.	553.4 lbs. / 251 kgs.	694.5 lbs. / 315 kgs.
Item Number	51024	51026	51028

Installation

IMPORTANT!!!PLEASE READ BEFORE INSTALLATION

- If the unit has recently been transported. Please let unit stand still for a minimum of 24 hours before

Installation

plugging it in.

- Make sure that the unit drops down to desired temperature before loading the unit with product.
- Make sure that there is proper ventilation around the unit in the area where it will operate.
- Make sure all accessories are installed (i.e. shelves, shelf clips, casters) before plugging the unit in.
- Please read through the operation / owners manual in its entirety.

CABINET LOCATION GUIDELINES

- Install the unit on strong and leveled surfaces.
 - Unit may make unpleasant noises if surface is uneven.
 - Unit may malfunction if surface is uneven.
- Install the unit in an indoor, well-ventilated area.
 - Unit performs more efficiently in a well-ventilated area.
 - For best performance, please maintain clearance of 6" on the back of the unit.
 - Outdoor use may cause decreased efficiency and damage to the unit.
- Avoid installation in a high humidity and/or dusty area.
 - Humidity could cause unit to rust and decrease efficiency of the unit.
 - Dust collected on condenser coil will cause unit to malfunction. Clean the condenser at least once a month with a brush or clean cloth.
- Select a location away from heat and moisture-generating equipment.
 - High ambient temperature will cause the compressor to overwork, leading to higher energy bills and gradual breakdown of the unit.

ELECTRICAL

Please ensure that the required voltage of the compressor is being supplied at all times. Low or high voltage can detrimentally affect the refrigeration unit. All units should be plugged into a grounded and properly-sized electrical outlet with appropriate overcurrent protection. Please refer to the electrical requirement on the nameplate. Please make sure that your unit has its own dedicated outlet. Do not use an extension cord.

REVERSING THE DOORS (OPTIONAL)

Note: This only applies to the single door units.

Only perform these steps with another person present to ensure the door does not fall over.

1. Open the door.
2. Remove the screws from the top panel, then open the top panel.
3. Remove the screws of the bottom louver, then remove the louver.
4. Unscrew all of the screws from the upper hinge.
5. Unscrew all of the screws from the lower hinge and remove the door and hinges.
6. Place the former upper hinge at the bottom of the unit, parallel to where the lower hinge is, do the same with the former lower hinge except for the top. Screw the hinges into place.
7. Reassemble the door so it is facing the opposite direction.
8. Reassemble the top panel and the lower louver.
9. The door is now reversed.

Maintenance

CLEANING THE CONDENSER COIL

- For efficient operation, it is important that the condenser surface be kept free of dust, dirt, and lint.
- We recommend cleaning the condenser coil and fins at least once per month.
- Clean with a commercial condenser coil cleaner, available from any kitchen equipment retailer. Brush the condenser fins from top to bottom, not side to side.
- After cleaning, straighten any bent condenser fins with a fin comb.

CLEANING THE FAN BLADE AND MOTOR

- If necessary, clean the fan blades and motor with a soft cloth, if it is necessary to wash the fan blades, cover the fan motor to prevent moisture damage.

CLEANING THE INTERIOR OF UNIT

- When cleaning the cabinet interior, use a solvent of warm water and mild soap.
- Do not use steel wool, caustic soap, abrasive cleaners, or bleach that may damage the stainless steel surface.
- Wash door gaskets on a regular basis, preferably weekly. Simply remove door gasket from the frame of the door, soak in warm water and soap for thirty (30) minutes, dry with soft cloth, and replace.
- Check door gaskets for proper seal after they are replaced.
- Periodically remove the shelves and pilasters from the unit and clean them with mild soap and warm water. To remove the pilasters, first remove the shelves and shelf brackets. Then, simply lift the pilaster up and out.

WARNING

Disconnect power cord before cleaning any parts of the unit.

ICE ACCUMULATION MAY OCCUR IN FREEZERS

- **Try to reduce the amount of time the freezer doors remain open to prevent ice accumulation.**
- **Keep door seals clean to prevent air leakage.**
- **Scrape off any ice accumulated or try manual defrost mode.**

Troubleshooting

Before requesting any service on your unit, please check the following points. Please note that this guide serve only as a reference for solutions to common problems.

SYMPTOM	POSSIBLE CAUSE	CORRECTIVE ACTION
Compressor not running.	Fuse blown or circuit breaker tripped.	Replace fuse or reset circuit breaker.
	Power cord unplugged.	Plug in power cord.
	Thermostat set too high.	Set thermostat to lower temperature.
	Cabinet in defrost cycle.	Wait for defrost cycle to finish.
Cabinet is noisy.	Loose part(s).	Locate and tighten loose part(s).
	Tubing vibration.	Ensure tubing is free from contact with other tubing or components.
Condensing unit runs for long periods of time.	Excessive amount of warm product placed in cabinet.	Allow adequate time for product to cool down.
	Prolonged door opening or door ajar.	Ensure doors are closed when not in use. Avoid opening doors for long periods of time.
	Door gasket(s) not sealing properly.	Ensure gaskets are snapped in completely. Remove gasket and wash with soap and water. Check condition of gasket and replace if necessary.
	Dirty condenser coil.	Clean the condenser coil.
	Evaporator coil iced over.	Unplug unit and allow coil to defrost. Make sure thermostat is not set too cold. Ensure that door gasket(s) are sealing properly.

Troubleshooting


Cabinet Temperature Is too warm.	Thermostat set too warm.	Set thermostat to lower temperature.
	Blocking air flow.	Re-arrange product to allow for proper air flow. Make sure there is at least four inches of clearance from evaporator.
	Excessive amount of warm product placed in cabinet.	Allow adequate time for product to cool down.
	Fuse blown or circuit breaker tripped.	Replace fuse or reset circuit breaker.
	Dirty condenser coil.	Clean the condenser coil.
	Prolonged door opening or door ajar.	Ensure doors are closed when not in use. Avoid opening doors for long periods of time.
	Evaporator coil iced over.	Unplug unit and allow coil to defrost. Make sure thermostat is not set too cold. Ensure that door gasket(s) are sealing properly.

Controller Instructions

Digital controller model: PJEZ for cooler





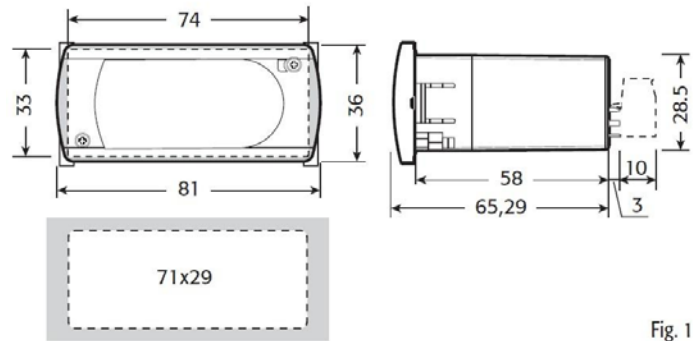



Dimensioni (mm) / Dimensions (mm)



Display and functions




During normal operation, the controller displays the value of the probe set using parameter/4 (=1 ambient probe, default, = 2 second probe, = 3 third probe). In addition, the display has LEDs that indicate the activation of the control functions (see Table 1), while the 3 buttons can be used to activate/deactivate some of the functions (see Table 2).

LED's and Associated Functions (Table 1)

Icon	Function	Normal Operation			Start Up
		ON	OFF	Blink	
	Compressor	On	Off	Request	ON
	Fan	On	Off	Request	ON
	Defrost	On	Off	Request	ON
	Aux	Output On	Output Off	-	ON
	Alarm	All	No Alarm	-	ON
	Clock	RTC fitted and enabled, at least 1 time band set	RTC not fitted or disabled, not even 1 time band set	-	ON if RTC fitted

Controller Instructions

Table of Functions activated by the buttons - Models S, X, Y, C (Table 2)

Button		Normal Operation		Start Up	
		Pressing the Button Alone	Pressed Together		
	Up ON/OFF	More than 3 sec: toggle ON/OFF	Start/Stop continuous cycle	-	
	Down Defrost	More than 3 sec: start/stop defrost			
	Set Mute	- 1 sec.: display/set the set point. - more than 3 secs.: access parameter setting menu (enter password) - mute audible alarm (buzzer)	-	Pressed together Start parameter reset procedure	For 1 sec. display firmware vers. code
					For 1 sec. RESET current EZY set

Setting the set point (desired temperature)

- Press **SET** for 1 sec, the set value will start flashing after a few moments.
- Increase or decrease the value using **UP** or **DOWN**.
- Press **SET** to confirm the new value.

Switching the device ON/OFF

Press **UP** for more than 3 sec. The control and defrost algorithms are now disabled and the instrument displays the message “OFF” alternating with the temperature read by the set probe.

Manual defrost

Press for **DOWN** more than 3 sec (the defrost starts only the temperature conditions are valid).

Continuous cycle

Press **UP** and **DOWN** together for more than 3 sec.

Access and setting type F (frequent) and type C (configuration) parameters

1. Press **SET** for 3 sec (the display will show “PS”).
2. • To access the type F and C parameter menu, enter the password “22” using **UP/DOWN**, press **SET** to confirm.
• To access the F parameter menu only, press **SET** (without entering the password).
3. Scroll inside the parameter menu using **UP/DOWN**.

Controller Instructions


- To display/set the values of the parameter displayed, press **SET**, then **UP/DOWN** and finally **SET** to confirm the changes (returning to the parameter menu).

To save all the new values and exit the parameter menu, press **SET** for 3 s.

To exit the menu without saving the changed values (exit by timeout) do not press any button for at least 60 s.

Parts Breakdown

Model RE-CN-0021-G-HC 51024

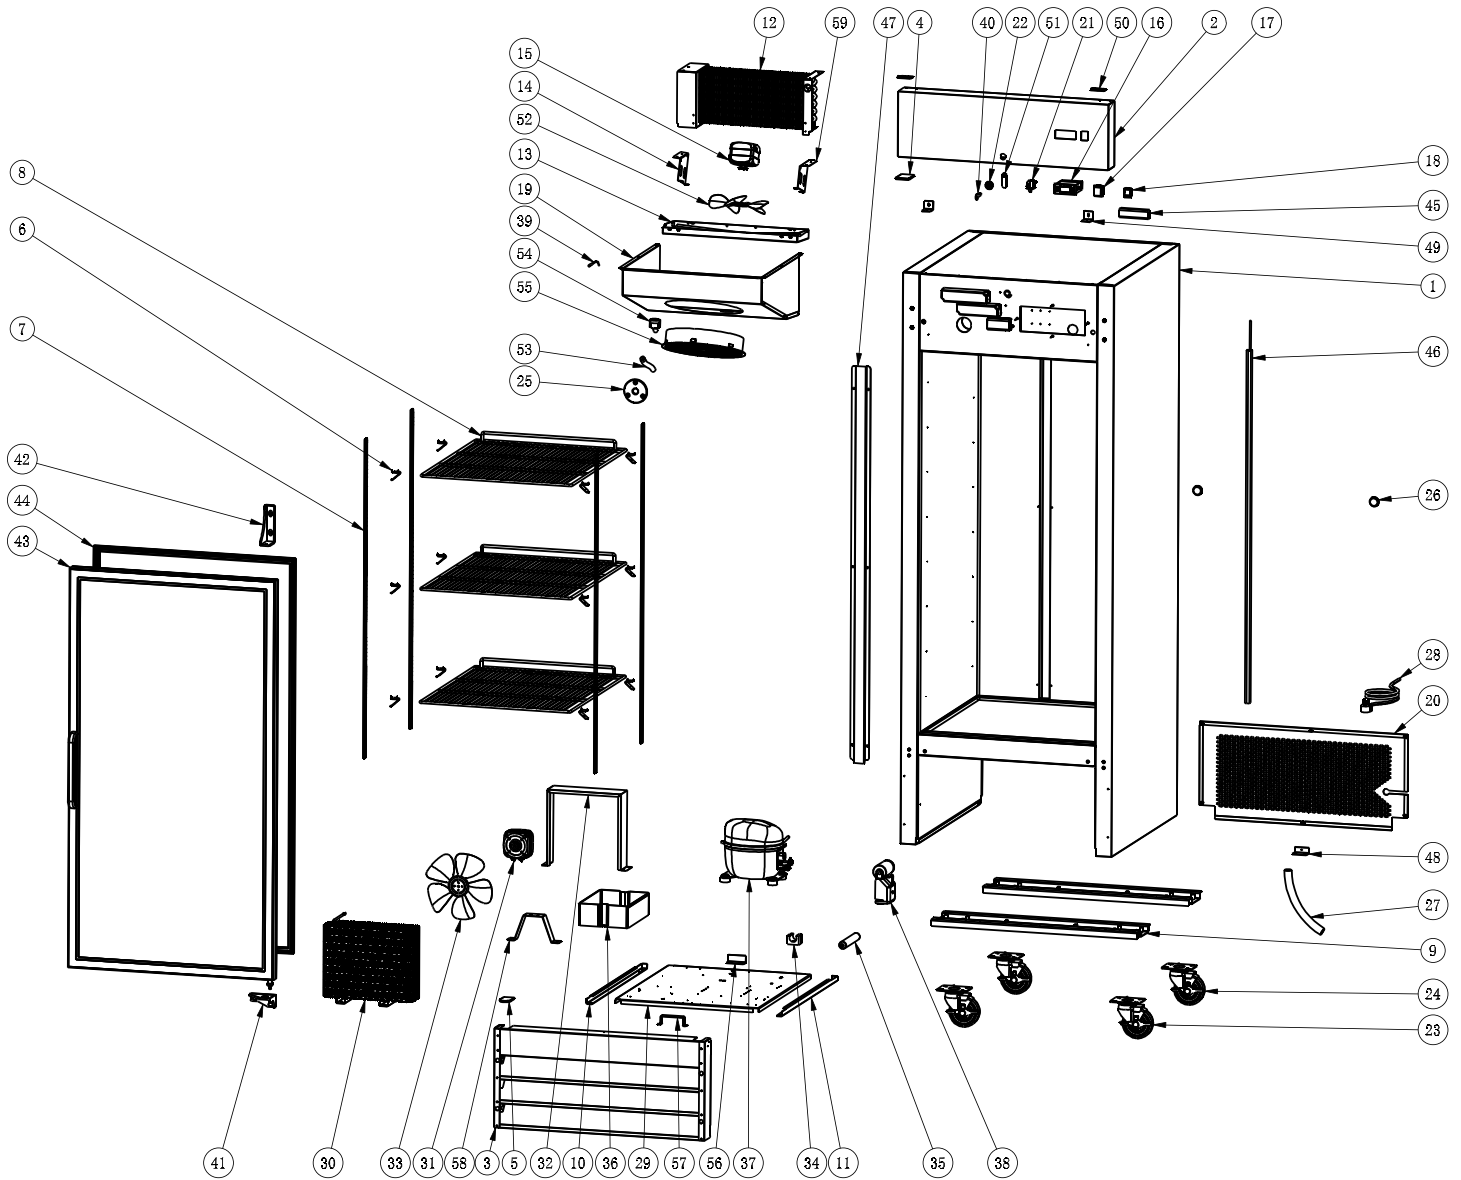


Parts Breakdown

Model RE-CN-0021-G-HC 51024

Item No.	Description	Position	Item No.	Description	Position	Item No.	Description	Position
AG440	Cabinet for 51024	1	AG450	Back Grill for 51024	20	AG456	Bottom Right Hinge for 51024	41
AG441	Control Panel for 51024	2	AB977	Door Switch for 51024	21	AG457	Upper Right Hinge for 51024	42
AF027	Front Grill for 51024	3	AA197	Lock for 51024	22, 40	AG458	Glass Door for 51024	43
AA972	Bottom Cover for Reversible Door for 51024	4, 5	26246	Caster with Brake for 51024	23	AG459	Gasket for 51024	44
AG442	K Clip for 51024	6	26247	Caster without Brake for 51024	24	AG460	Transformer for 51024	45
AG443	K Strip for 51024	7	AG451	Drain Plug for 51024	25	AG461	LED Light for 51024	46
AG444	Shelf for 51024	8	AB169	Foaming Hole Cover for 51024	26	AG462	Baffle of Suction Line for 51024	47
AF029	Leg Supporter for 51024	9	AA216	Drain Tube for 51024	27	AG463	Back Grill Fixer for 51024	48
AF040	Left Track for Assembling Panel for 51024	10	AA805	Power Cord for 51024	28	AG464	Control Panel Fixer for 51024	49
AF041	Right Track for Assembling Panel for 51024	11	AG452	Compressor Unit Installation Board for 51024	29	AA959	Hinge for 51024	50
AG445	Evaporator for 51024	12	AA986	Condenser for 51024	30	AG465	Lock Bolt for 51024	51
AG446	Inner Drain Pan for 51024	13	AG453	Air Guide Sheet for 51024	32	AA969	Drain Hose for 51024	53
AG447	Left Evaporator Fan Motor Holder for 51024	14	AA764	Condenser/Evaporator Fan Motor Blade for 51024	33, 52	AG466	Elbow Pipe for 51024	54
AG448	Evaporator Fan Motor for 51024	15, 31	AB595	Filter Fixer for 51024	34	AG467	Evaporator Fan Motor Cover for 51024	55
AB109	Thermostat for 51024	16	AB594	Filter for 51024	35	AG468	Limited Block of Installation Board for 51024	56
AA124	Power Switch for 51024	17	AA874	Outer Drain Pan for 51024	36	AG469	Compressor Unit Handle for 51024	57
AA362	LED Light Switch for 51024	18	AG454	Compressor for 51024	37	AG470	Condenser Fan Motor Holder for 51024	58
AG449	Evaporator Cover for 51024	19	AG455	Temperature Sensor of Cabinet Inside for 51024	39	AG471	Right Evaporator Fan Motor Holder for 51024	59

Parts Breakdown

Model RE-CN-0041-G-HC 51026

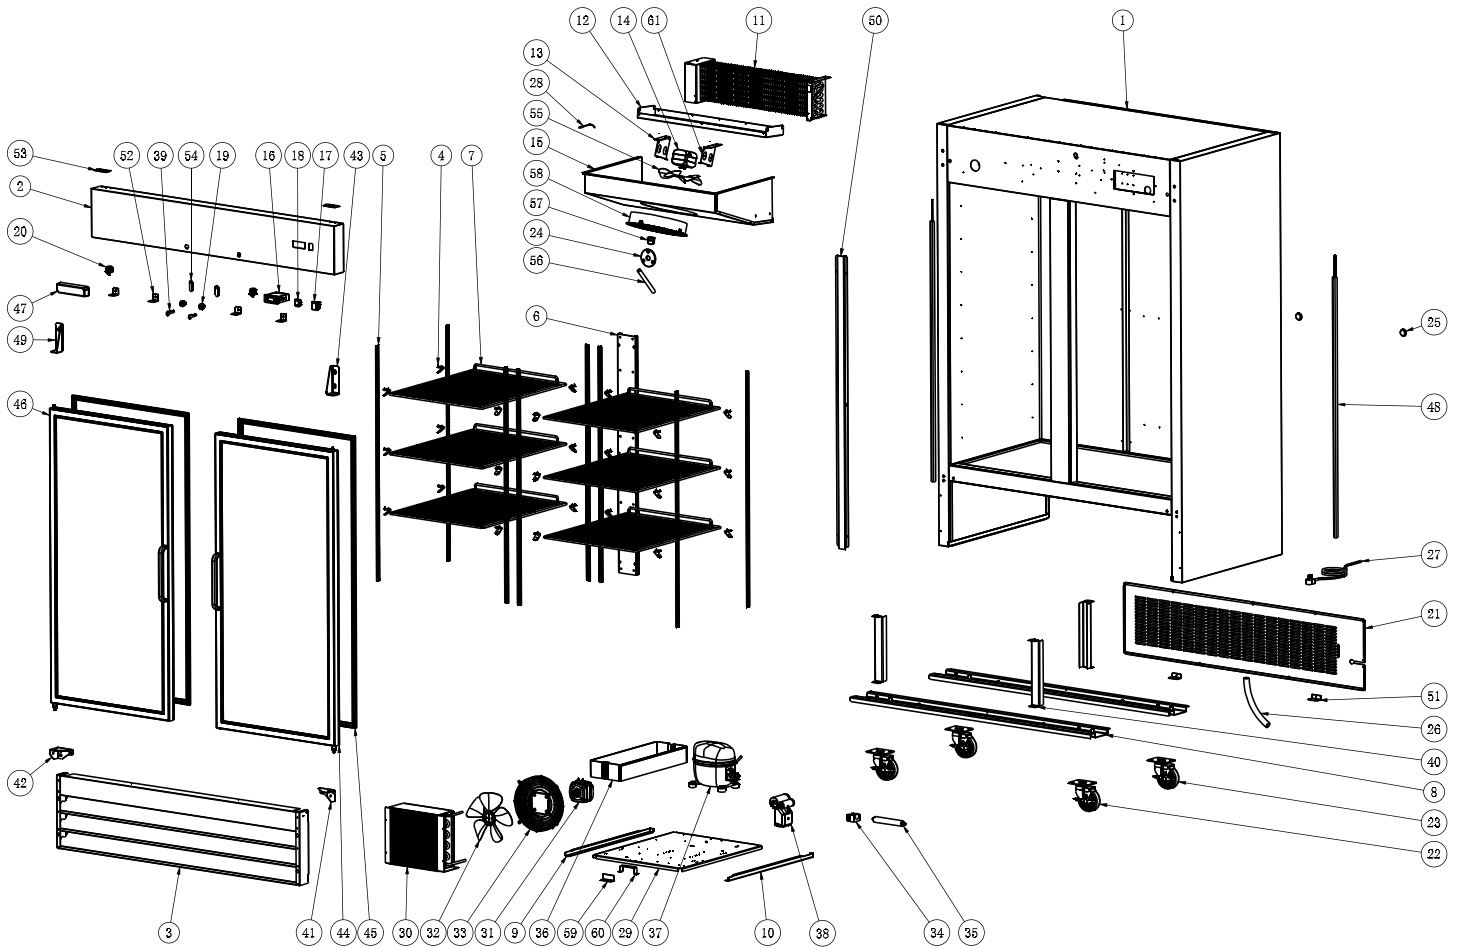


Parts Breakdown

Model RE-CN-0041-G-HC 51026

Item No.	Description	Position	Item No.	Description	Position	Item No.	Description	Position
AG548	Cabinet for 51026	1	AG554	Back Grill for 51026	21	AG457	Upper Right Hinge for 51026	43
AG549	Control Panel for 51026	2	26246	Caster with Brake for 51026	22	AG560	Right Glass Door for 51026	44
AF048	Front Grill for 51026	3	26247	Caster without Brake for 51026	23	AG561	Gasket for 51026	45
AG442	K Clip for 51026	4	AG451	Drain Plug for 51026	24	AG562	Left Glass Door for 51026	46
AG443	K Strip for 51026	5	AB169	Foaming Hole Cover for 51026	25	AG563	Transformer for 51026	47
AG550	Back Brackets for 51026	6	AA216	Drain Tube for 51026	26	AG461	LED Light for 51026	48
AG444	Shelf for 51026	7	AA805	Power Cord for 51026	27	AG564	Upper Left Hinge for 51026	49
61471	Leg Supporter for 51026	8	AG455	Temperature Sensor of Cabinet Inside for 51026	28	AG462	Baffle of Suction Line for 51026	50
AF040	Left Track for Assembling Panel for 51026	9	AG452	Compressor Unit Installation Board for 51026	29	AG463	Back Grill Fixer for 51026	51
AF041	Right Track for Assembling Panel for 51026	10	AG555	Condenser for 51026	30	AG464	Control Panel Fixer for 51026	52
AG551	Evaporator - New Style 4R7K620L (Dia -7.94) for 51026	11	AA248	Condenser Fan Blade for 51026	32, 55	AA959	Hinge for 51026	53
AG552	Inner Drain Pan for 51026	12	AG556	Condenser Fan Cover for 51026	33	AG465	Lock Bolt for 51026	54
AG447	Left Evaporator Fan Motor Holder for 51026	13	AB595	Filter Fixer for 51026	34	AA969	Drain Hose for 51026	56
AG448	Evaporator Fan Motor for 51026	14, 31	AB594	Filter D25x160-B for 51026	35	AG466	Elbow Pipe for 51026	57
AG553	Evaporator Cover for 51026	15	AB970	Outer Drain Pan for 51026	36	AG467	Evaporator Fan Motor Cover for 51026	58
AB109	Thermostat for 51026	16	64168	Compressor for 51026	37	AG468	Limited Block of Installation Board for 51026	59
AA124	Power Switch for 51026	17	AG557	Parts of Compressor for 51026	38	AG469	Compressor Unit Handle for 51026	60
AA362	LED Light Switch for 51026	18	AG558	Cabinet Supporter for 51026	40	AG471	Right Evaporator Fan Motor Holder for 51026	61
AA197	Lock for 51026	19, 39	AG456	Bottom Right Hinge for 51026	41			
AB977	Door Switch for 51026	20	AG559	Left Bottom Hinge for 51026	42			

Parts Breakdown

Model RE-CN-0067-G-HC 51028

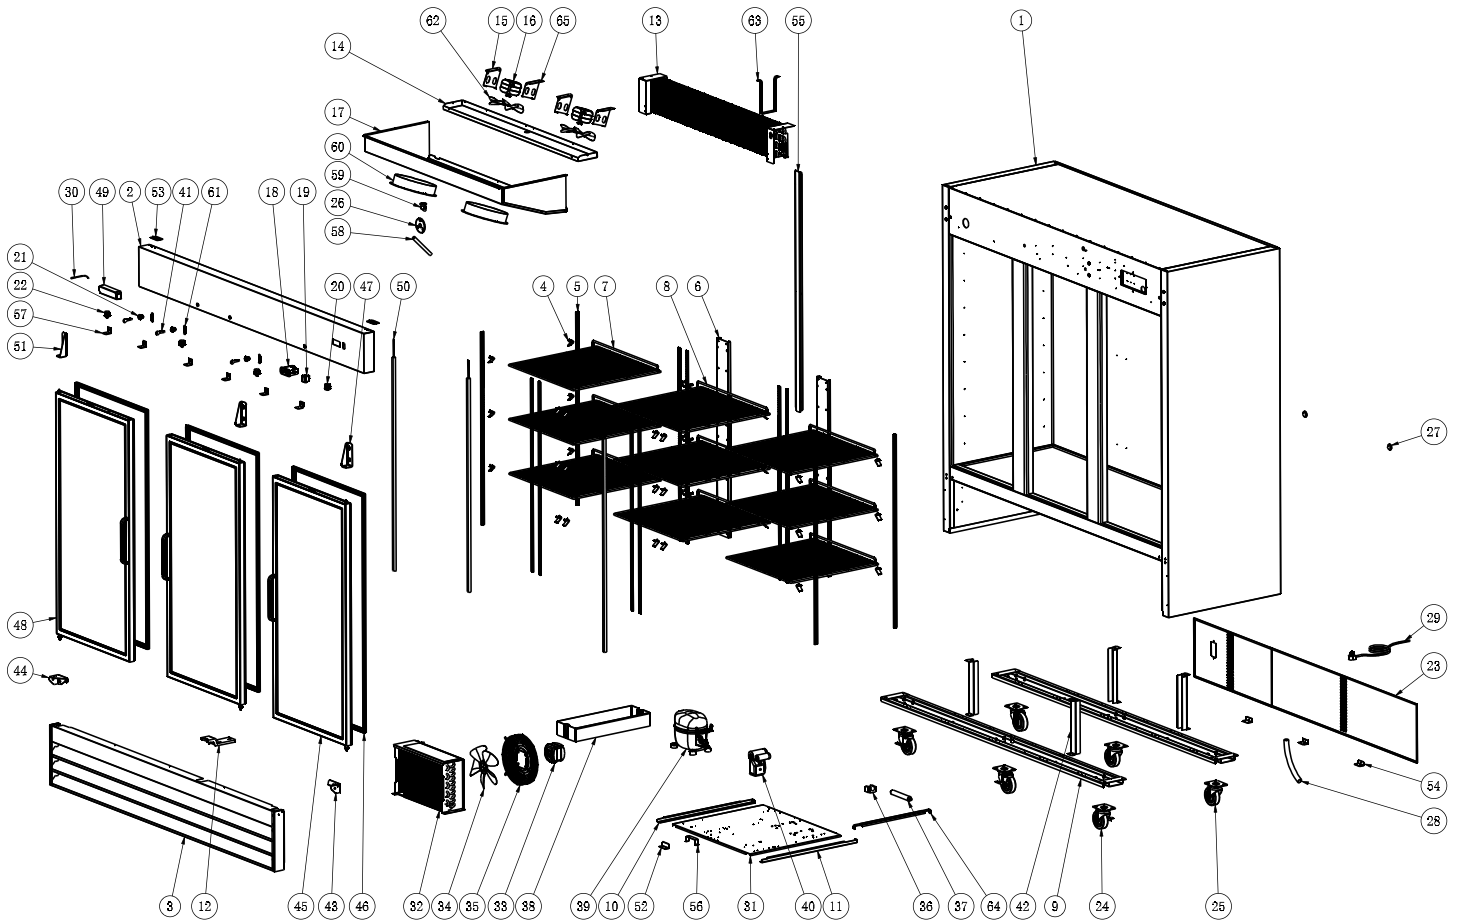


Parts Breakdown

Model RE-CN-0067-G-HC 51028

Item No.	Description	Position	Item No.	Description	Position	Item No.	Description	Position
AG565	Cabinet for 51028	1	AB977	Door Switch for 51028	22	AG561	Gasket for 51028	46
AG566	Control Panel for 51028	2	AG571	Back Grill for 51028	23	AG457	Upper Right Hinge for 51028	47
AF060	Front Grill for 51028	3	26246	Caster with Brake for 51028	24	AG562	Left Glass Door for 51028	48
AG442	K Clip for 51028	4	26247	Caster without Brake for 51028	25	AG563	Transformer for 51028	49
AG443	K Strip for 51028	5	AG451	Drain Plug for 51028	26	AG461	LED Light for 51028	50
AG550	Back Brackets for 51028	6	AB169	Foaming Hole Cover for 51028	27	AG564	Upper Left Hinge for 51028	51
AG444	Shelf for 51028	7	AA216	Drain Tube for 51028	28	AG468	Limited Block of Installation Board for 51028	52
AG567	Middle Shelf for 51028	8	AA805	Power Cord for 51028	29	AA959	Hinge for 51028	53
AF061	Leg Supporter for 51028	9	AG455	Temperature Sensor of Cabinet Inside for 51028	30	AG463	Back Grill Fixer for 51028	54
AF040	Left Track for Assembling Panel for 51028	10	AG572	Compressor Unit Installation Board for 51028	31	AG462	Baffle of Suction Line for 51028	55
AF041	Right Track for Assembling Panel for 51028	11	AG555	Condenser for 51028	32	AG469	Compressor Unit Handle for 51028	56
AB090	Middle Bottom Hinge for 51028	12	AA248	Condenser Fan Blade for 51028	34, 62	AG464	Control Panel Fixer for 51028	57
AG568	Evaporator for 51028	13	AG556	Condenser Fan Cover for 51028	35	AA969	Drain Hose for 51028	58
AG569	Inner Drain Pan for 51028	14	AB595	Filter Fixer for 51028	36	AG466	Elbow Pipe for 51028	59
AG447	Left Evaporator Fan Motor Holder for 51028	15	AB594	Filter D25x160-B for 51028	37	AG467	Evaporator Fan Motor Cover for 51028	60
AG448	Evaporator Fan Motor for 51028	16, 33	AB970	Outer Drain Pan for 51028	38	AG465	Lock Bolt for 51028	61
AG570	Evaporator Cover for 51028	17	AG573	Compressor EMC3140U for 51028	39	AG574	Defrost Heater Fixer for 51028	63
AB109	Thermostat for 51028	18	AG558	Cabinet Supporter for 51028	42	AG575	Auxiliary Track for 51028	64
AA124	Power Switch for 51028	19	AG456	Bottom Right Hinge for 51028	43	AG471	Right Evaporator Fan Motor Holder for 51028	65
AA362	LED Light Switch for 51028	20	AG559	Left Bottom Hinge for 51028	44			
AA197	Lock for 51028	21, 41	AG560	Right Glass Door for 51028	45			

Electrical Schematics


Model RE-CN-0041-G-HC 51026

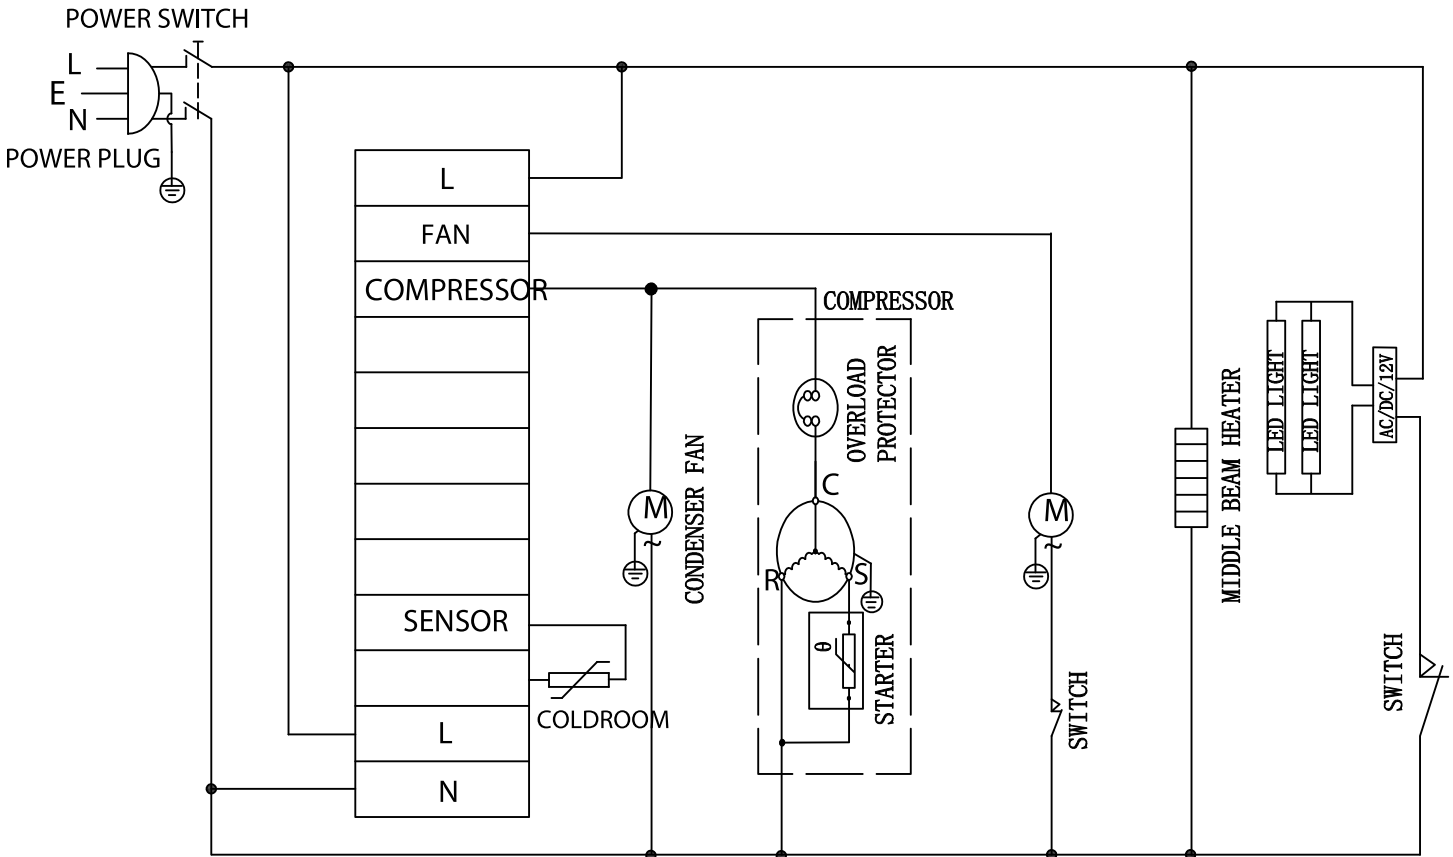

NEMA
5 - 15P
125VAC / 15 AMP

Electrical Schematics

Model RE-CN-0067-G-HC 51028

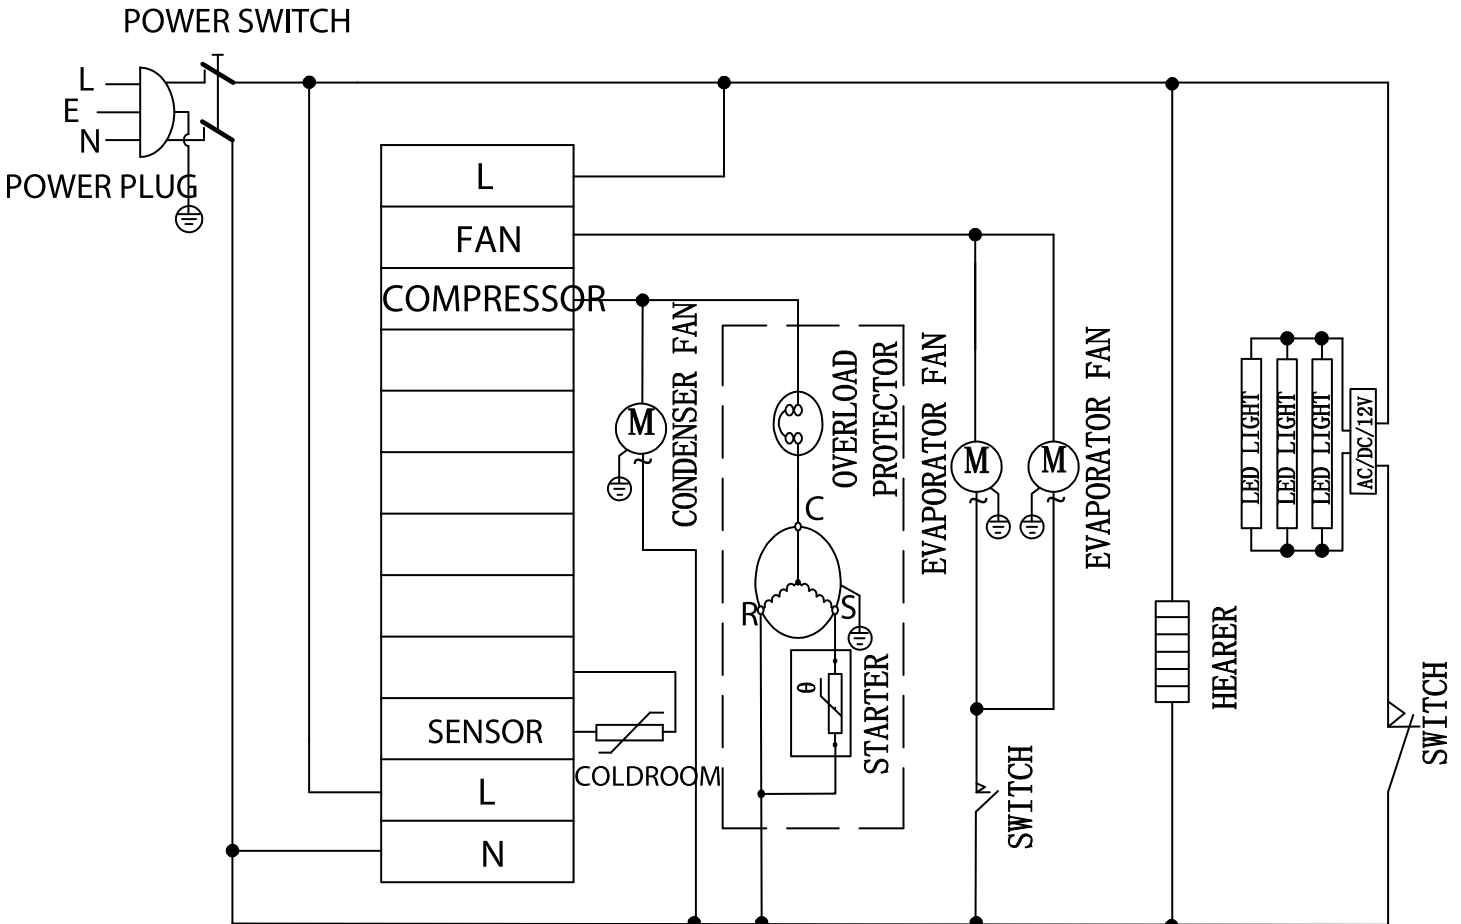

NEMA
5 - 15P
125VAC / 15 AMP



Warranty Registration

Thank you for purchasing an Omcan product. To register your warranty for this product, complete the information below, tear off the card at the perforation and then send to the address specified below. You can also register online by visiting:

Merci d'avoir acheté un produit Omcan. Pour enregistrer votre garantie pour ce produit, complétez les informations ci-dessous, détachez la carte au niveau de la perforation, puis l'envoyer à l'adresse spécifiée ci-dessous. Vous pouvez également vous inscrire en ligne en visitant:

Gracias por comprar un producto Omcan usted. Para registrar su garantía para este producto, complete la información a continuación, cortar la tarjeta en la perforación y luego enviarlo a la dirección indicada a continuación. También puede registrarse en línea en:

<https://omcan.com/warranty-registration/>

For mailing in Canada

Pour postale au Canada

Por correo en Canadá

OMCAN

PRODUCT WARRANTY REGISTRATION

3115 Pepper Mill Court,

Mississauga, Ontario

Canada, L5L 4X5

For mailing in the US

Pour diffusion aux États-Unis

Por correo en los EE.UU.

OMCAN

PRODUCT WARRANTY REGISTRATION

4450 Witmer Industrial Estates, Unit 4,

Niagara Falls, New York

USA, 14305

or email to: service@omcan.com



Purchaser's Information

Name: _____

Address: _____

City: _____ Province or State: _____ Postal or Zip: _____

Country: _____

Dealer from which Purchased: _____

Dealer City: _____ Dealer Province or State: _____

Invoice: _____

Model Name: _____ Model Number: _____

Machine Description: _____

Date of Purchase (MM/DD/YYYY): _____

Would you like to extend the warranty? Yes No

Company Name: _____

Telephone: _____

Email Address: _____

Type of Company:

Restaurant Bakery Deli

Butcher Supermarket Caterer

Institution (*specify*): _____

Other (*specify*): _____

Serial Number: _____

Date of Installation (MM/DD/YYYY): _____

Thank you for choosing Omcan | Merci d'avoir choisi Omcan | Gracias por elegir Omcan



Since 1951 Omcan has grown to become a leading distributor of equipment and supplies to the North American food service industry. Our success over these many years can be attributed to our commitment to strengthen and develop new and existing relationships with our valued customers and manufacturers. Today with partners in North America, Europe, Asia and South America, we continually work to improve and grow the company. We strive to offer customers exceptional value through our qualified local sales and service representatives who provide convenient access to over 6,500 globally sourced products.

Depuis 1951 Omcan a grandi pour devenir un des “leaders” de la distribution des équipements et matériel pour l’industrie des services alimentaires en Amérique du Nord. Notre succès au cours de ces nombreuses années peut être attribué à notre engagement à renforcer et à développer de nouvelles et existantes relations avec nos clients et les fabricants de valeur. Aujourd’hui avec des partenaires en Amérique du Nord, Europe, Asie et Amérique du Sud, nous travaillons continuellement à améliorer et développer l’entreprise. Nous nous efforçons d’offrir à nos clients une valeur exceptionnelle grâce à nos ventes locales qualifiées et des représentants de service qui offrent un accès facile à plus de 6500 produits provenant du monde entier.

Desde 1951 Omcan ha crecido hasta convertirse en un líder en la distribución de equipos y suministros de alimentos en América del Norte industria de servicios. Nuestro éxito en estos años se puede atribuir a nuestro compromiso de fortalecer y desarrollar nuevas relaciones existentes con nuestros valiosos clientes y fabricantes. Hoy con socios de América del Norte, Europa, Asia y América del Sur, que trabajan continuamente para mejorar y crecer la empresa. Nos esforzamos por ofrecer a nuestros clientes valor excepcional a través de nuestro local de ventas y representantes de los servicios que proporcionan un fácil acceso a más de 6,500 productos con origen a nivel mundial.

