Heated Pass-Through Stations

ITEM:	47510	43465	47511	47512	47513
MODEL:	DW-CN-0065	DW-CN-0085	DW-CN-0102	DW-CN-0121	DW-CN-0138
SIZE:	24"	32"	38"	44"	50"





Keep your food hot at a perfect serving temperature.

This display warmer is the perfect solution for keeping food hot, fresh, and ready to go. Ideal for convenience stores, cafeterias, and food service counters.

Designed to showcase hot food items while maintaining consistent serving temperatures, it features brilliant internal LED lighting for enhanced visibility, an adjustable temperature controller for optimal heat control, and three chrome-plated adjustable shelves to suit a variety of items. Smooth rear sliding doors ensure easy access for staff or customers, making it a convenient and efficient addition to any high-traffic food service area. Built from black powder-coated galvanized steel and stainless steel, it is durable and easy to clean.

FEATURES

- Tempered glass
- Sleek design with interior lighting
- Chrome-plated adjustable shelves
- Adjustable divider rods
- Adjustable temperature controller & display
- Durable black powder-coated galvanized steel & stainless steel construction

Telephone: 1-800-465-0234 Fax: (905) 607-0234 Email: sales@omcan.com Website: www.omcan.com

Authorized Dealer


Made in China

TECHNICAL SPECIFICATION

Features	24" Warmer	32" Warmer	38" Warmer	44" Warmer	50" Warmer
Item Number	**47510**	**43465**	**47511**	**47512**	**47513**
Model	DW-CN-0065	DW-CN-0085	DW-CN-0102	DW-CN-0121	DW-CN-0138
Capacity	2.29 cu.ft. (65 L)	3 cu.ft. (85 L)	3.6 cu.ft. (102 L)	4.27 cu.ft. (121 L)	4.87 cu.ft. (138 L)
Lamp Power	16 W	32 W	16 W	40 W	40 W
Electrical	110 V / 60 Hz / 1 Ph	110 V / 60 Hz / 1 Ph	110 V / 60 Hz / 1 Ph	110 V / 60 Hz / 1 Ph	110 V / 60 Hz / 1 Ph
Power	1800 W	1800 W	1800 W	1800 W	1800 W
Current	15 A	15 A	15 A	15 A	15 A
Temperature Range	86°F – 194°F (30°C – 90°C)	86°F – 194°F (30°C – 90°C)	86°F – 194°F (30°C – 90°C)	86°F – 194°F (30°C – 90°C)	86°F – 194°F (30°C – 90°C)
Interior Dimensions (WDH)	22" x 22.6" x 17.5" (560 x 573 x 445 mm)	29.9" x 22.6" x 17.5" (760 x 573 x 445 mm)	35.9" x 22.6" x 17.5" (913 x 573 x 445 mm)	42" x 22.7" x 17.6" (1066 x 576 x 447 mm)	35.9" x 22.6" x 17.5" (913 x 573 x 445 mm)
Net Dimensions (WDH)	23.6" x 27.8" x 27.2" (600 x 707 x 691 mm)	31.5" x 27.8" x 27.2" (800 x 707 x 691 mm)	37.5" x 27.8" x 27.2" (953 x 707 x 691 mm)	43.5" x 27.8" x 27.2" (1106 x 707 x 691 mm)	49.6" x 27.8" x 27.2" (1259 x 707 x 691 mm)
Net Weight	86 lb (39 kg)	92.6 lb (41 kg)	108 lb (49 kg)	121.2 lb (55 kg)	143.3 lb (65 kg)
Construction	Black powder-coated galvanized steel & stainless steel	Black powder-coated galvanized steel & stainless steel	Black powder-coated galvanized steel & stainless steel	Black powder-coated galvanized steel & stainless steel	Black powder-coated galvanized steel & stainless steel


TECHNICAL DRAWING


ITEM 47510 • 24" WARMER

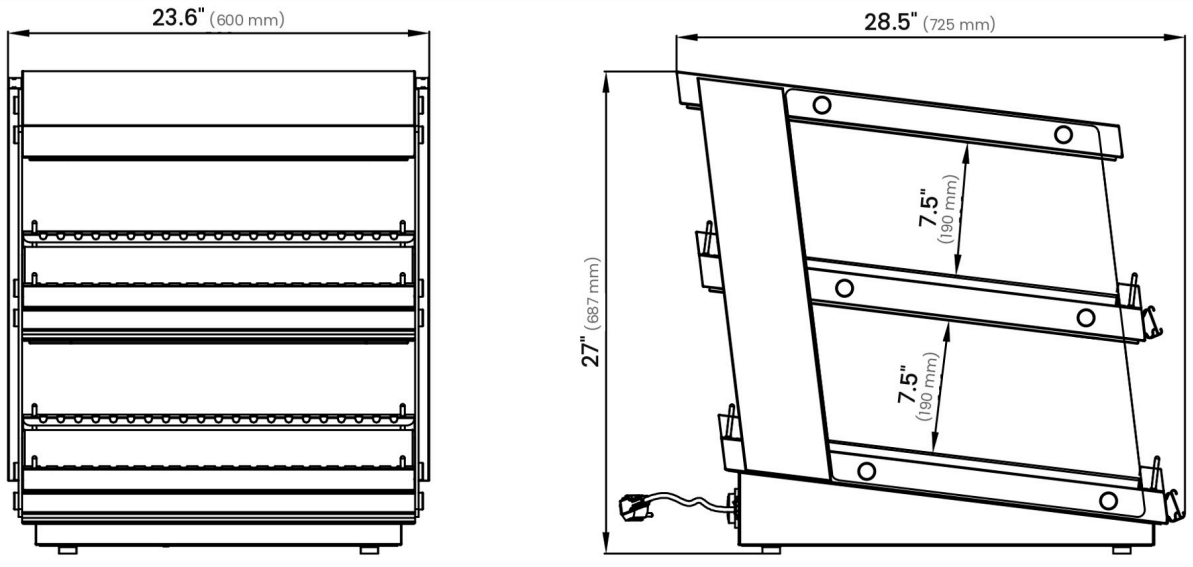


TECHNICAL DRAWINGS


ITEM 43465 • 32" WARMER

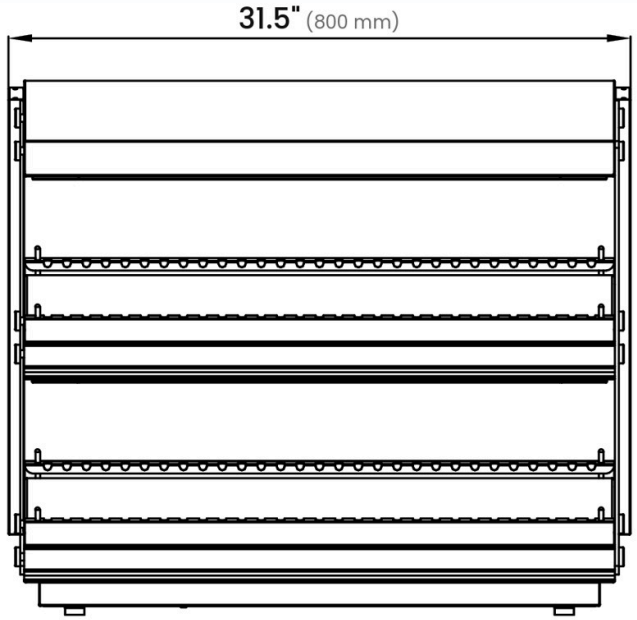

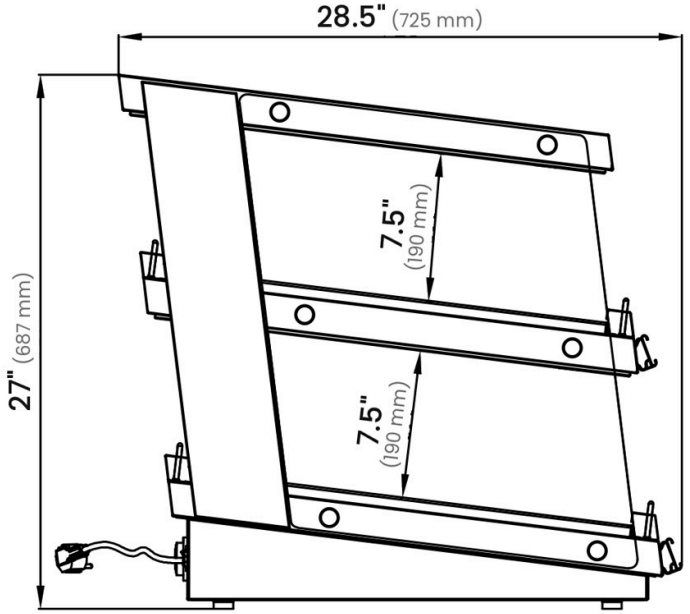


ITEM 47511 • 38" WARMER

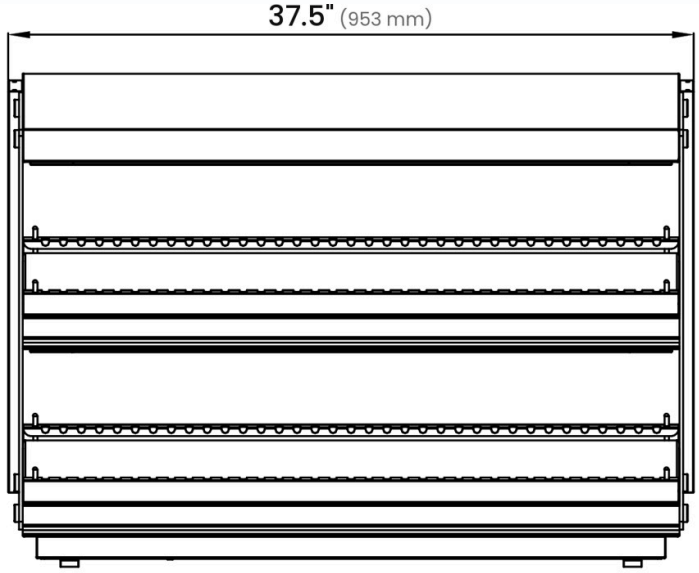


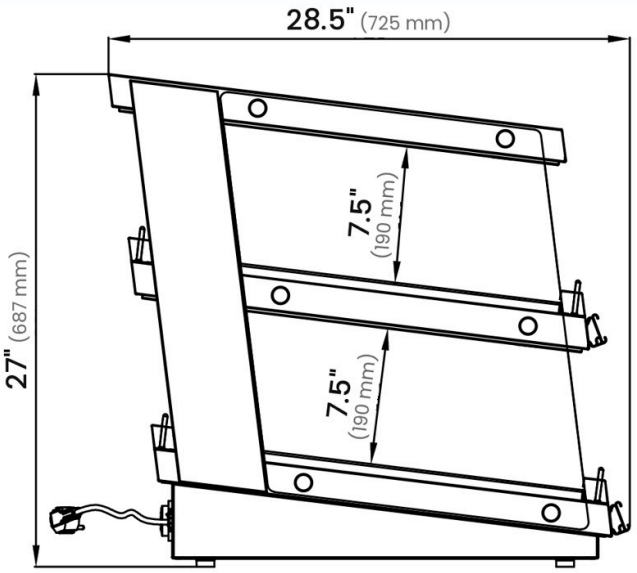

TECHNICAL DRAWINGS

ITEM 47512 • 44" WARMER

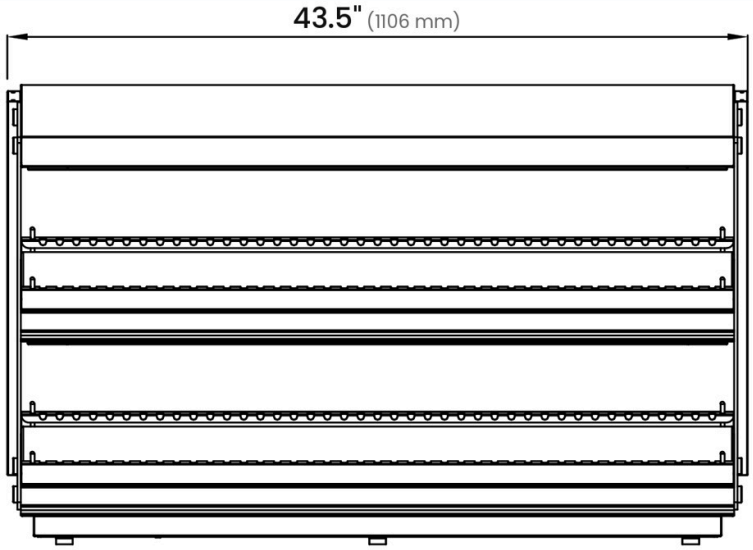

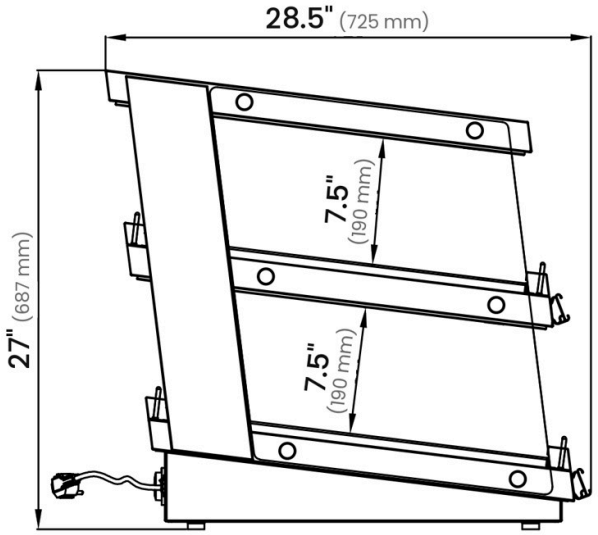

ITEM 47513 • 50" WARMER

