

Ice Cream Dipping Freezers (WITHOUT SNEEZE GUARD)

ITEM:	44590	48657	44588	44589	48648
MODEL:	FR-CN-0160-S	FR-CN-0260-S	FR-CN-0360-S	FR-CN-0460-S	FR-CN-0560-S

Scoop and serve from the front counter with an ice cream dipping freezer.

These dipping freezers hold from 6 to 22 three-gallon tubs at -15°F to 6.8°F (-26°C to -14°C), in five widths from 26" to 71". Double sliding doors with locks keep product secure between services.

The exterior is white powder-coated steel with a precoated steel interior wall, and plastic trim on the edges helps prevent injuries and damage. Casters, two with brakes, make each unit easy to move and clean around.

- 6 to 22 three-gallon tub capacity
- 26" to 71" widths
- Double sliding doors with locks
- White powder-coated steel exterior
- Plastic edge trim
- Casters, 2 with brakes

Sneeze guard not included. An optional flat glass sneeze guard is sold separately for each size: 44590 – AR268 • 48657 – AR077 • 44588 – AR269 • 44589 – AC958 • 48648 – AR270



44590 • 26"



48657 • 39"



44588 • 50"



44589 • 60"



48648 • 71"

Images shown with optional sneeze guard (sold separately).

AT A GLANCE

Certification	cETLus • ETL Sanitation
Warranty	1 Year Parts • 1 Year Labor



Telephone: 1-800-465-0234

Fax: (905) 607-0234

Email: sales@omcan.com

Website: www.omcan.com



AUTHORIZED DEALER


Shipped by
Freight

cETLus
Certified

ETL Sanitation
Certified

1 Year Parts
Warranty


1 Year Labor
Warranty

NEMA 5-15P
Plug Type


TECHNICAL SPECIFICATION					
	44590 FR-CN-0160-S	48657 FR-CN-0260-S	44588 FR-CN-0360-S	44589 FR-CN-0460-S	48648 FR-CN-0560-S
Width	26"	39"	50"	60"	71"
Capacity (3-Gallon Tubs)	4 + 2	6 + 4	8 + 6	10 + 8	12 + 10
Temperature Range	-15°F to 6.8°F (-26°C to -14°C)	-15°F to 6.8°F (-26°C to -14°C)	-15°F to 6.8°F (-26°C to -14°C)	-15°F to 6.8°F (-26°C to -14°C)	-15°F to 6.8°F (-26°C to -14°C)
Doors	Double Sliding	Double Sliding	Double Sliding	Double Sliding	Double Sliding
Compressor	0.25 HP+	0.4 HP+	0.4 HP+	0.5 HP+	0.4 HP+
Amps	3 A	3 A	4 A	4 A	4 A
Casters	4 (2 with brakes)	4 (2 with brakes)	4 (2 with brakes)	4 (2 with brakes)	6 (2 with brakes)
Net Weight	154 lb (70 kg)	127 lb (58 kg)	242.5 lb (110 kg)	280 lb (127 kg)	194 lb (88 kg)
Net Dimensions (WDH)	26" x 28" x 34.5" (665 x 715 x 876 mm)	39" x 28" x 34.5" (995 x 715 x 876 mm)	49.6" x 28" x 34.5" (1260 x 715 x 876 mm)	60" x 28" x 34.5" (1524 x 715 x 876 mm)	71" x 28" x 34.5" (1800 x 715 x 876 mm)
Sneeze Guard	Not included	Not included	Not included	Not included	Not included
Optional Sneeze Guard (Sold Separately)	Item AR268	Item AR077	Item AR269	Item AC958	Item AR270
Certification	cETLus • ETL Sanitation	cETLus • ETL Sanitation	cETLus • ETL Sanitation	cETLus • ETL Sanitation	cETLus • ETL Sanitation
Warranty	1 Year Parts • 1 Year Labor	1 Year Parts • 1 Year Labor	1 Year Parts • 1 Year Labor	1 Year Parts • 1 Year Labor	1 Year Parts • 1 Year Labor

TECHNICAL DRAWING

Item: 44590

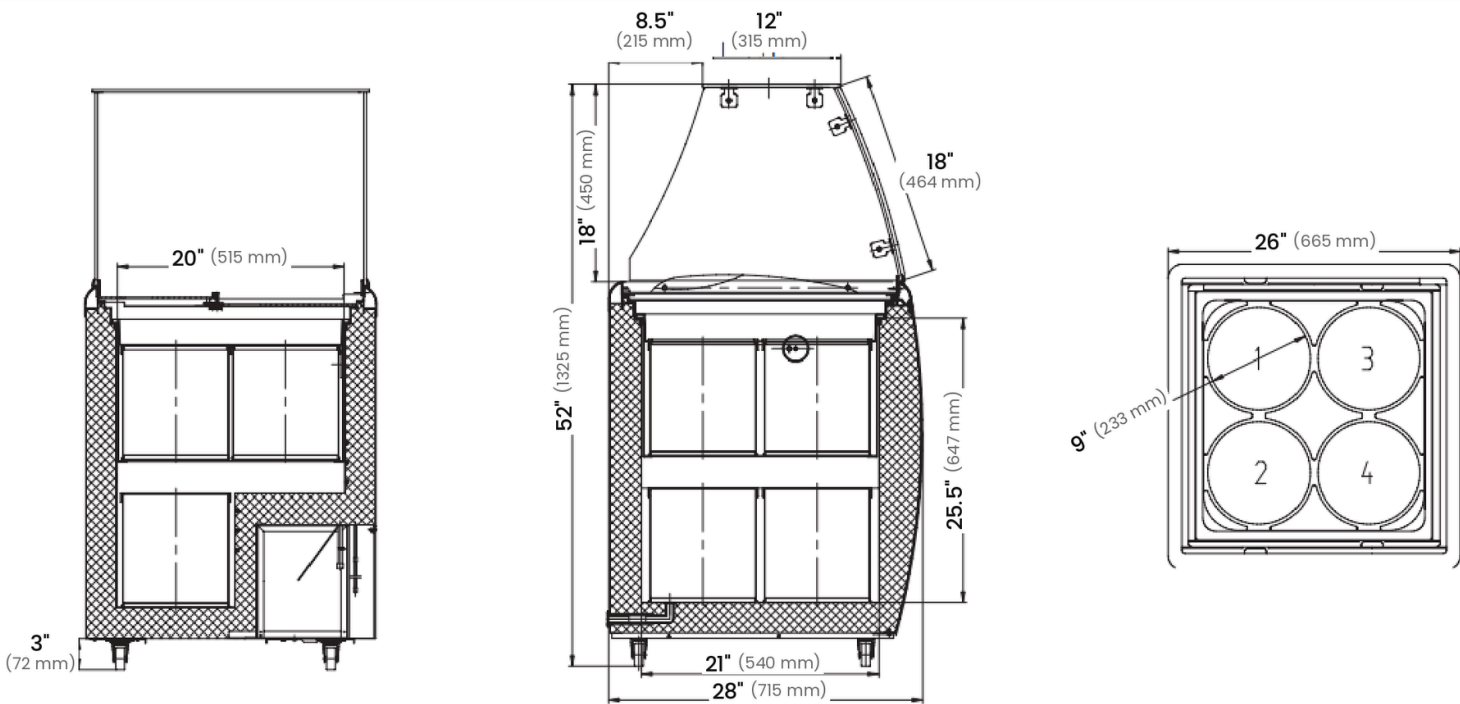


Item: 48657

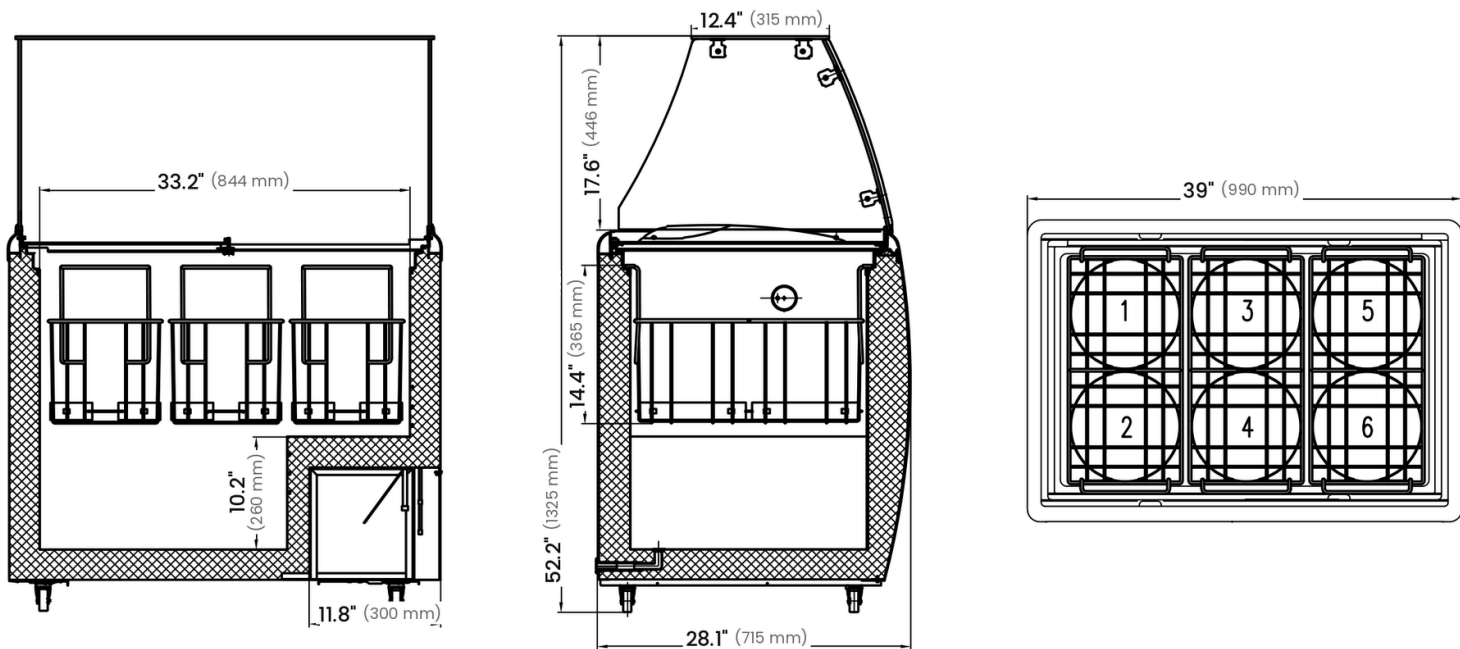


TECHNICAL DRAWING

Item: 44588

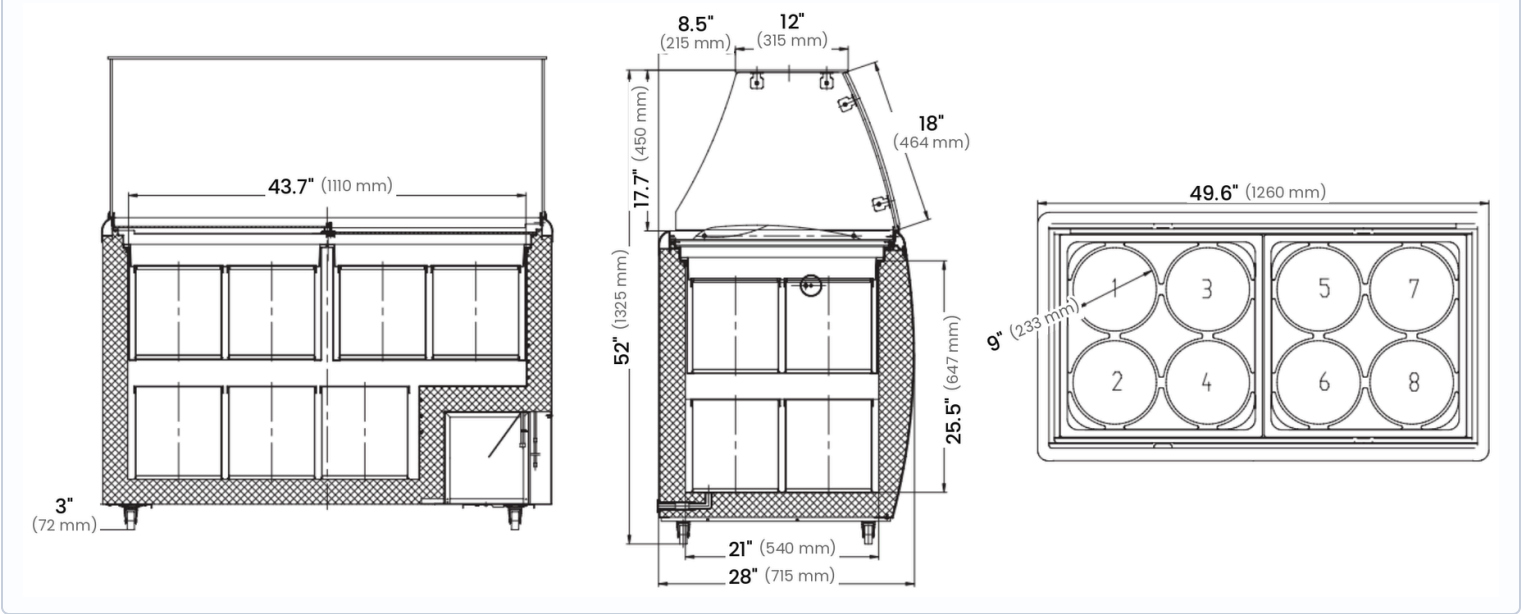


Item: 44589

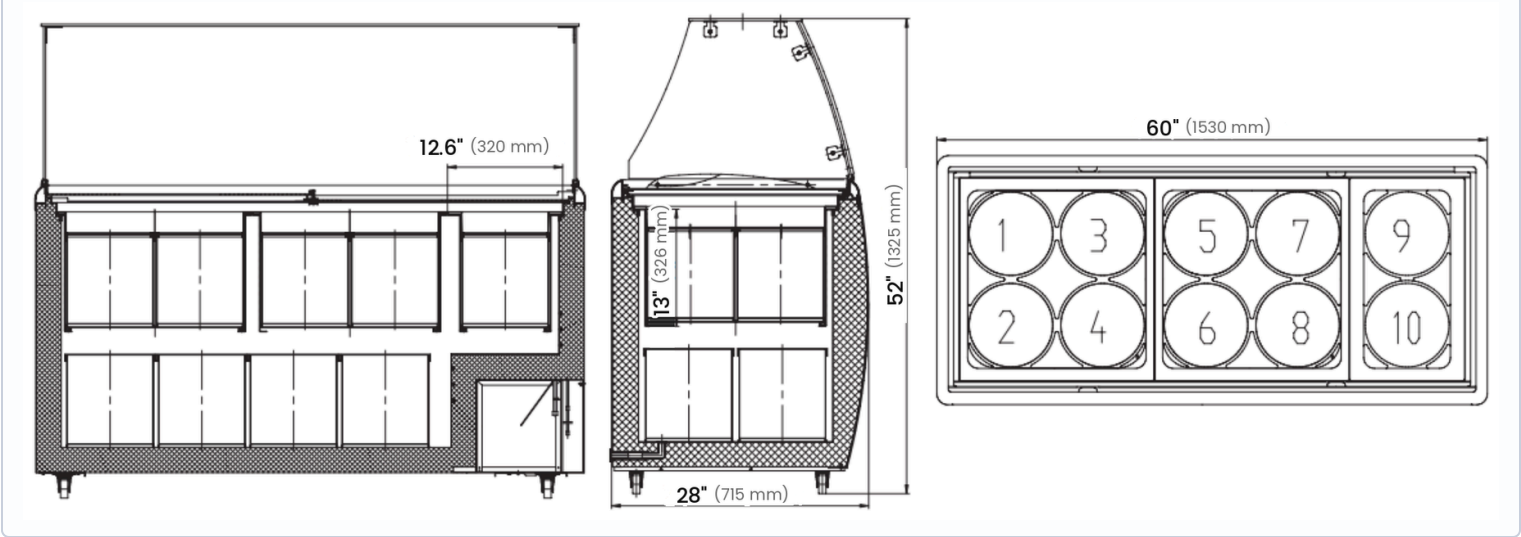

TECHNICAL DRAWING

Item: 48648

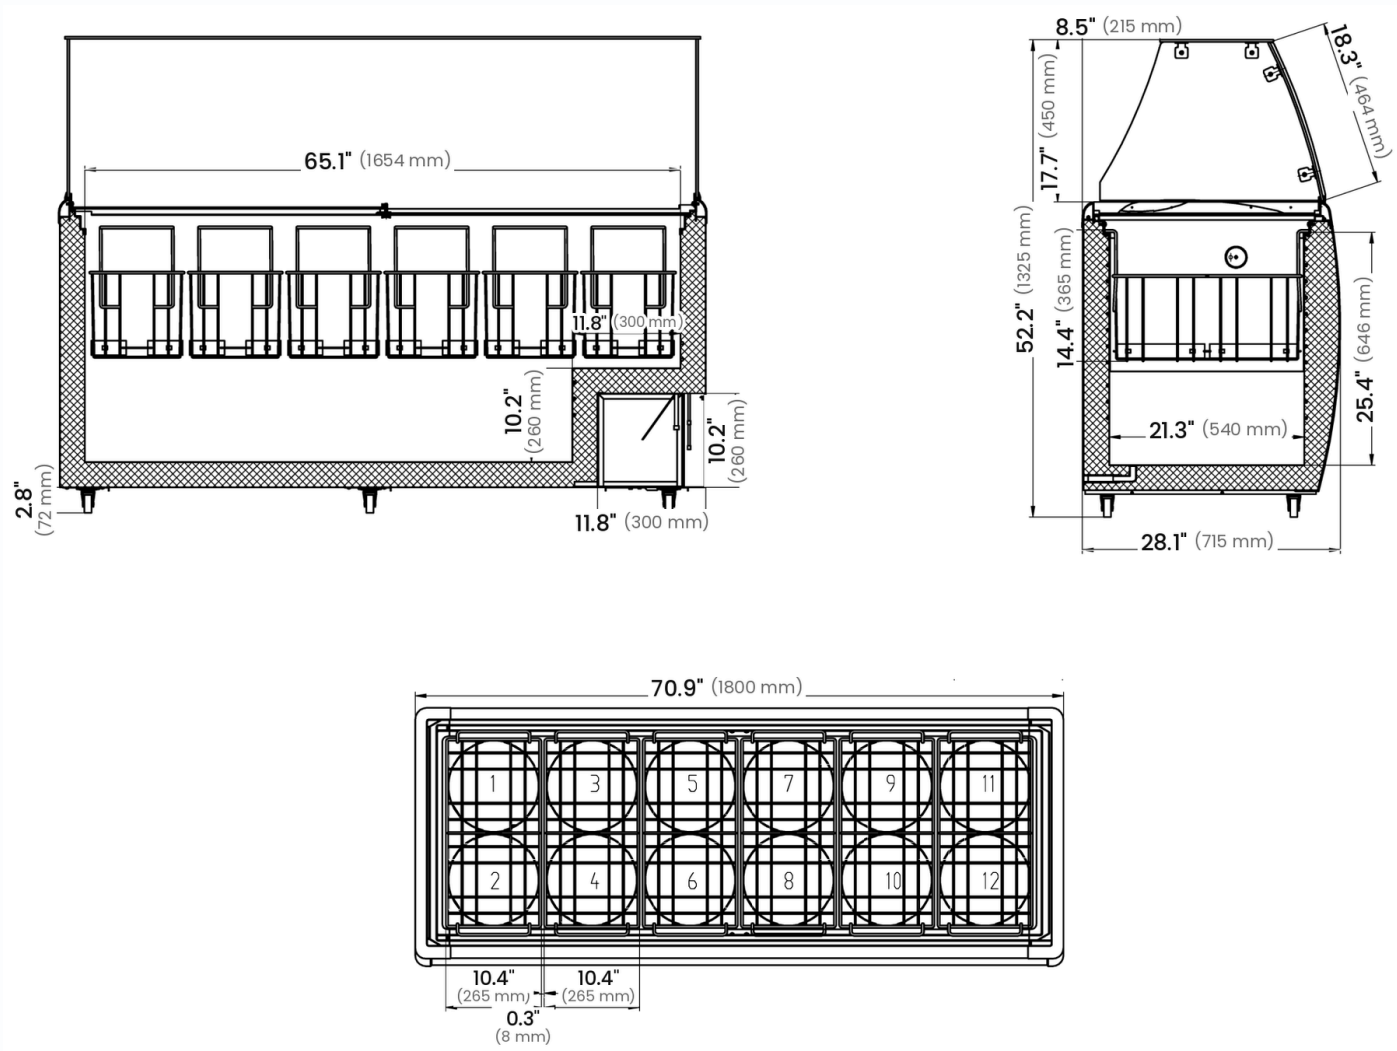

Specifications subject to change without notice.