

Kromo Aqua Undercounter Dishwasher

ITEM: 49125
MODEL: CD-IT-50-1-AQUA



Simple, yet effective

This dishwasher is ideal for bars, pubs, restaurants, and hotels. These undercounter machines, with a redesigned control panel, features a wide loading capacity granting the highest performance at a reasonable price.


FEATURES:

- Double skin door
- 1 wash cycle
- Overflow and drain pipes integrated system, for a triple protection of the wash pump
- Anti-drop roof panel
- Door security microswitch
- Split wash and rinse arms
- Built-in rinse-aid dispenser
- Fully automatic process
- Standard drain pump
- Detergent dispenser

OPTIONS:

- Cold rinse
- S/S surface filters

Technical Drawing

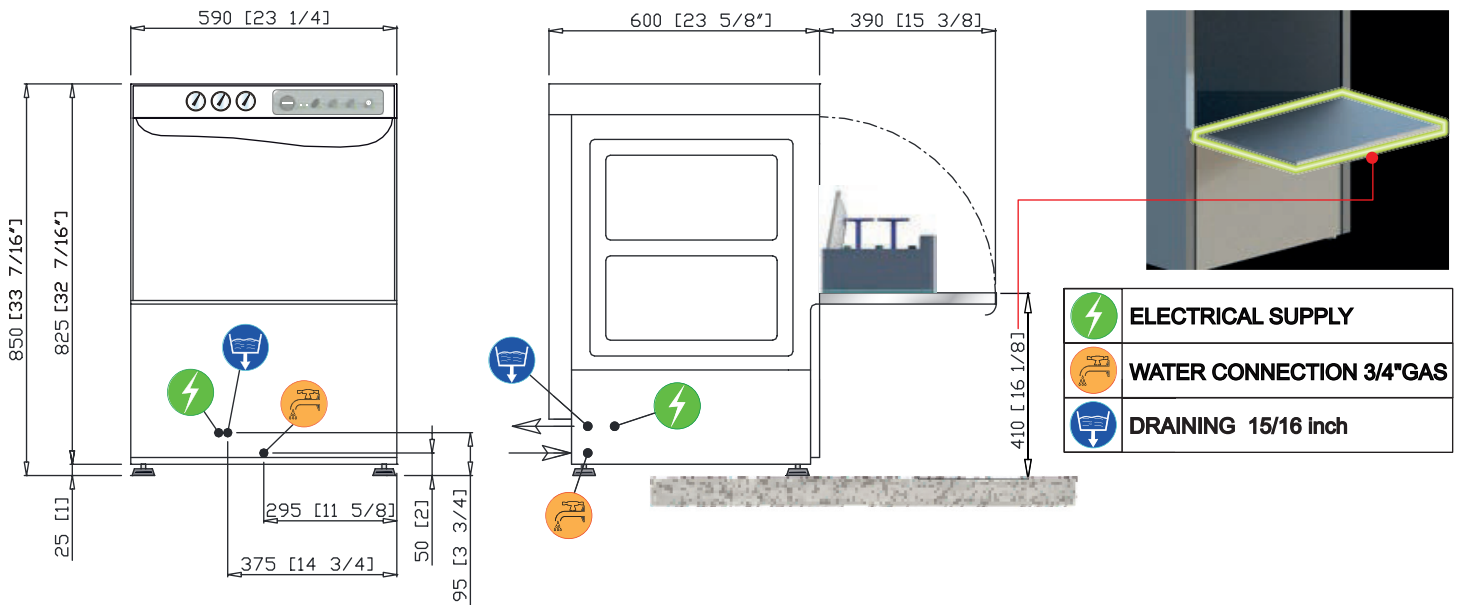

Technical Specification

| | | |
|---|-------------------------|------------|
| Item | 49125 | |
| Model | CD-IT-50-1-AQUA | |
| Water Hardness | 2 - 8 °F | |
| Rinsing Temperature (Set) | 185 °F (85 °C) | |
| Tank Capacity | 30.64 Qt. (29 L) | |
| Tank Heating Element | 2940 W | |
| Tank Temperature (Set) | 160 °F (71 °C) | |
| Booster Capacity | 6.04 Qt. (5.71 L) | |
| Booster Heating Element | 6530 W | |
| Inlet Water Pressure | 25 - 95 PSI | |
| Power | 7090 W | |
| Electrical | 220-240V / 60 Hz / 1 Ph | |
| Water Consumption / Cycle (rinse pressure 15 PSI) | 2.96 Qt. (2.8 L) | |
| Washing Cycles (sec) | 1 (120) | 2 (180) |

| | | |
|-------------------------------------|--|----|
| Water Supply 131 °F Racks /H (*)(') | 30 | 20 |
| Water Supply 50 °F Racks /H (*)(') | 21 | 20 |
| Pump Power | 560 W (359 Qt./339 L per minute***) | |
| Drain Pump | 43 W hMAX 31.5" (800 mm) (43.12 Qt. / 40.8 L***) | |
| Noise | 63 dB(A) | |
| Rack Equipment | (1) Plastic Plates Basket (1) Large Mesh Glass Basket (1) Cutlery Basket | |
| Rack Dimensions | 20" x 20" (508 x 508 mm) | |
| Crockery Dimensions | Plates: 13.62" (346 mm) dia. Dishes Max Height: 12.62" (320 mm) | |
| Net Weight | 125 lb. (56.5 kg.) | |
| Net Dimensions (WDH) | 23.25" x 23.62" x 33.43" (591 x 600 x 850 mm) | |
| Gross Weight | 143 lb. (65 kg.) | |
| Gross Dimensions (WDH) | 26" x 26" x 40" (660 x 660 x 1010 mm) | |

(*) Standard Thermostop

(') In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

(***) Maximum Flow Rate