

Reach-In Freezer, Solid Door, Stainless Steel

ITEM: 50023 50025 50027
MODEL: FR-CN-0737-HC FR-CN-1372-HC FR-CN-2057-HC




High-performance commercial Reach-In Freezers built for efficiency.

This commercial reach-in freezer offers ample frozen storage, keeping ingredients fresh and ready for use. Digital temperature control with an LCD display allows easy monitoring and adjustment, while a ventilated cooling system ensures even, consistent temperatures. Its stainless steel construction delivers a professional look, durability, and easy cleaning. Self-closing doors help maintain optimal temperatures, and automatic defrost reduces maintenance, preventing ice buildup. Cyclopentane insulation ensures temperature retention, keeping food frozen at optimal conditions for longer.

For added convenience, this unit features heavy-duty casters with brakes for easy mobility and cleaning access. Adjustable PVC-coated shelves provides flexible storage, while bright interior lighting ensures quick product visibility. Designed for performance and durability, this freezer is a reliable choice for high-demand commercial kitchens.

FEATURES:


- Digital temperature control and LCD display
- Durable Stainless steel design
- Self-closing doors
- Heavy-duty casters with brakes
- Adjustable PVC-coated shelves
- Automatic defrost
- Cyclopentane Insulation material
- Ventilated cooling system




TECHNICAL SPECIFICATION			
Features	29" wide/ 23 cu.ft. capacity	54" wide/ 47 cu.ft. capacity	81" wide/ 72 cu.ft. capacity
Item	50023	50025	50027
Model	FR-CN-0737-HC	FR-CN-1372-HC	FR-CN-2057-HC
Capacity	23 cu. ft. / 650 L	47 cu.ft. / 1331 L	72 cu.ft. / 2040 L
Number of Doors	1 Swing Door – Solid Door	2 Swing Doors – Solid Door	3 Swing Doors – Solid Door
Self Closing Door	Yes		
Number of Shelves	3	6	9
Shelf Capacity	59.5 lbs/ 27 kgs	90 lbs/ 41 kgs	61.7 lbs/ 28 kgs
Electrical	110-120V / 60Hz / 1Ph		
Refrigerant	R290		
Shelf Material	Plastic Coated		
Cooling System	Ventilated		
Temperature Controller	Digital		
Insulation Material	Cyclopentane		
Defrosting	Automatic		
Temperature Range	-22.2 to -17.8°C (-8 to 0°F)		
Number of Casters	4		
Power	456 W	780 W	1 1/4 HP
Current	4.9 A	8.5 A	12 A
Plug Type	NEMA 5-15P		
Interior Dimensions (WDH)	24.4" x 27.1" x 53.5" / 620 x 688 x 1360 mm	49.4" x 27.1" x 53.5" / 1255 x 688 x 1360 mm	76.3" x 27.1" x 60.2" / 1938 x 688 x 1530 mm
Net Weight	282.2 lbs/ 128 kgs	447.5 lbs/ 203 kgs	674.6 lbs/ 306 kgs
Net Dimensions (WDH)	29" x 32.2" x 82.5" / 736 x 818 x 2095 mm	54" x 32.2" x 82.5" / 1371 x 818 x 2095 mm	80.9" x 32.2" x 82.5" / 2054 x 818 x 2095 mm
Gross Weight	322 lbs/ 146 kgs	531 lbs/ 241 kgs	765 lbs/ 347 kgs
Gross Dimensions (WDH)	31" x 35" x 85" / 770 x 890 x 2160 mm	57" x 35" x 85" / 1435 x 890 x 2160 mm	84" x 35" x 85" / 2120 x 890 x 2160 mm

TECHNICAL DRAWING

Item: 50023/ 29"

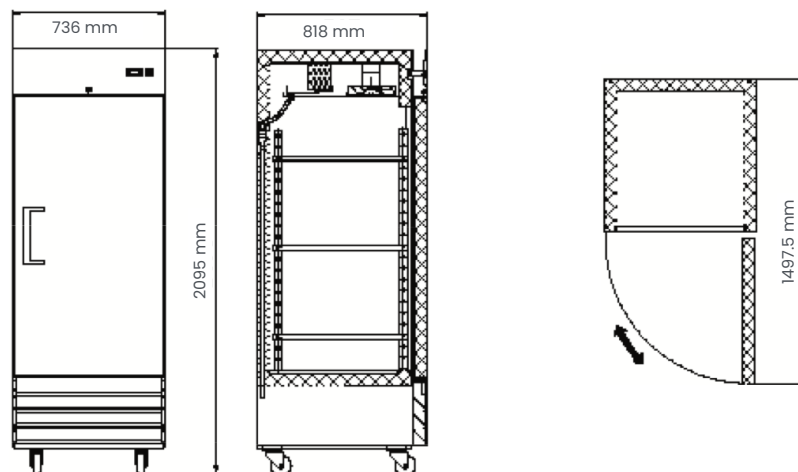

Item: 50025/ 54"

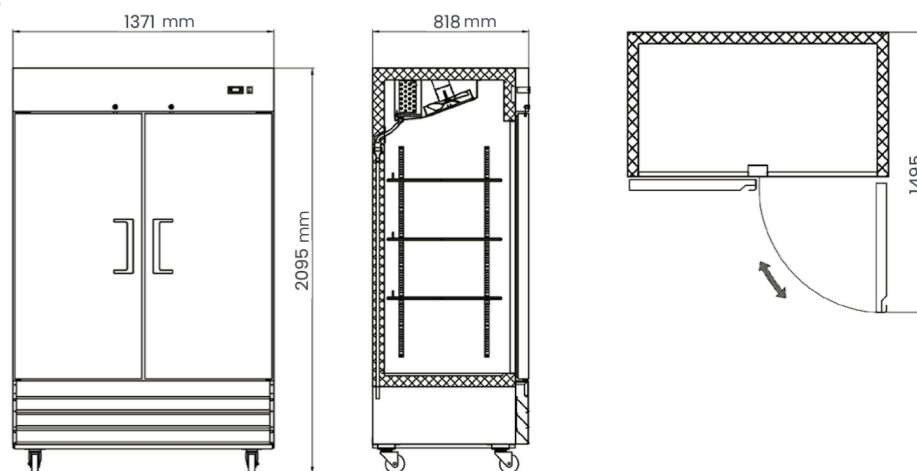

Item: 50027/ 81"

