

Stainless Steel Undercounter Refrigerator with Doors

ITEM:	50054	50102	50056	50093	50091
MODEL:	RE-CN-0006-HC	RE-CN-0008-HC	RE-CN-0011-HC	RE-CN-0015-HC	RE-CN-0016-HC



Keeping cold storage fresh, reliable, and always within reach.




This undercounter refrigerator provides compact, reliable cold storage beneath counters or work tables, keeping ingredients close at hand while saving space. Built with durable stainless steel inside and out, it features a digital temperature controller, ventilated cooling with automatic defrost, and eco-friendly R290 refrigerant. Self-closing doors with a 90° stay-open option, adjustable PVC-coated shelves, and locking casters deliver durability and convenience for busy kitchens.

- Durable Stainless Steel construction
- Maintains safe food temperatures
- Digital temperature controller
- Ventilated system
- Automatic defrost
- Adjustable PVC-coated shelves
- Eco-friendly R290
- Easy to clean interior
- Self-closing doors
- Casters with brakes for mobility




TECHNICAL SPECIFICATION					
Features	27"- 1 Door/ 177 L	36"- 2 Doors/246 L	47 "- 2 Doors/338 L	60"- 2 Doors/ 425 L	72"- 3 Doors/440 L
Item	50054	50102	50056	50093	50091
Model	RE-CN-0006-HC	RE-CN-0008-HC	RE-CN-0011-HC	RE-CN-0015-HC	RE-CN-0016-HC
Capacity	6.3 cu.ft./ 177 L	8.7 cu. ft / 246 L	12 cu.ft./ 338 L	15 cu.ft./ 425 L	15.5 cu.ft./ 440 L
Shelf Capacity	44 lbs/ 20 kgs	88 lbs / 39.9 kgs	39.6 lbs/ 18 kgs	88 lbs/ 39.9 kgs	
Number of Shelves	1 Shelf	2 Shelves			3 Shelves
Shelf Material	Plastic Coated Steel				
Number of Doors	1 Self Closing Door	2 Self Closing Doors			3 Self Closing Doors
Material	Stainless Steel				
Temperature Range	0.5°C - 5°C / 33°F - 41°F				
Defrosting	Automatic				
Temperature Controller	Digital				
Cooling System	Ventilated				
Isolation Material	Cyclopentane				
Refrigerant	R290				
Electrical	115V / 60Hz / 1Ph				
Power	124 W	250 W	149 W	324 W	149 W
Current	1.9 A	2.3 A	2.7A	3.12 A	3.2A
Interior Dimensions (WDH)	22" x 22.8" x 23.5" / 565 x 580 x 597 mm	33" x 19.8" x 23.5" / 838 x 504 x 597 mm	42.5" x 22.8" x 23.5" / 1080 x 580 x 597 mm	55.6" x 19.8" x 23.5" / 1413 x 504 x 597 mm	66.9" x 19.8" x 23.5" / 1698 x 504 x 597 mm
Net Dimensions (WDH)	27" x 29.5" x 35" / 685 x 750 x 895 mm	36" x 29.5" x 35" / 920 x 750 x 895 mm	47" x 29.5" x 35" / 1200 x 750 x 895 mm	60" x 29.5" x 38.8" / 1529 x 750 x 985 mm	72" x 29.5" x 35" / 1829 x 750 x 895 mm
Gross Dimensions (WDH)	30" x 32.7" x 38.6" / 770 x 830 x 980 mm	39" x 32" x 38" / 990 x 820 x 970 mm	50.4" x 32.7" x 38.6" / 1280 x 830 x 980 mm	63" x 32" x 38" / 1600 x 820 x 970 mm	74" x 32" x 38" / 1885 x 820 x 970 mm
Net Weight	169 lbs /76.7 kgs	90 kgs/ 198 lbs	229 lbs / 103.9 kgs	254 lbs/ 115 kgs	297.6 lbs / 135 kgs
Gross Weight	220 lbs /99.8 kgs	113 kgs/ 249 lbs	273 lbs / 123.8 kgs	324 lbs/ 147 kgs	372.6 lbs / 169 kgs
Plug Type	NEMA 5-15P				

TECHNICAL DRAWING

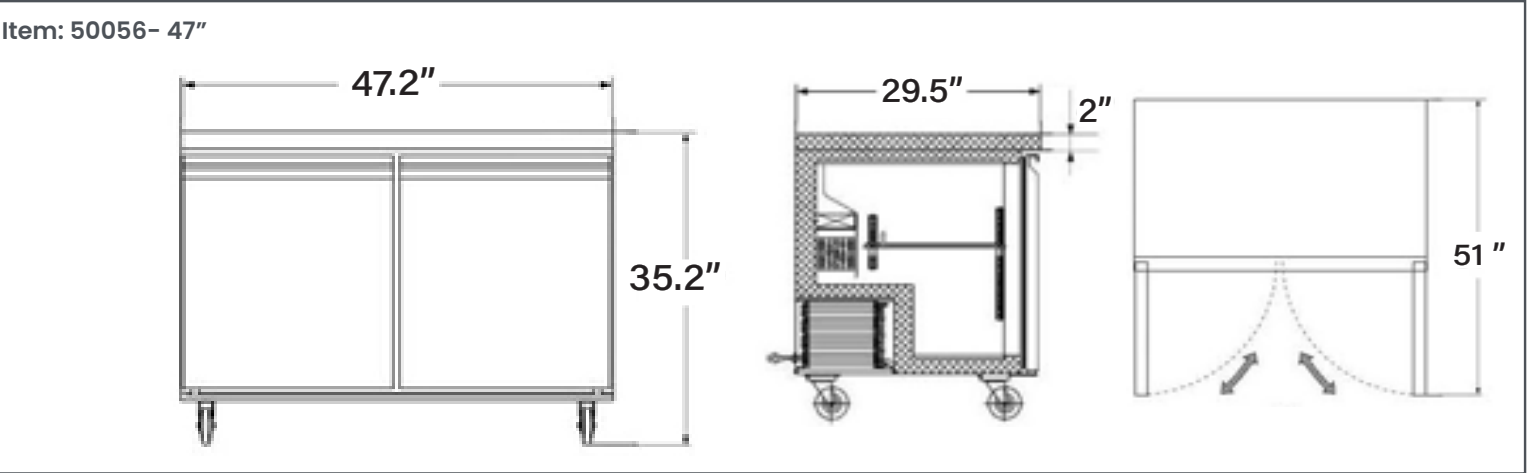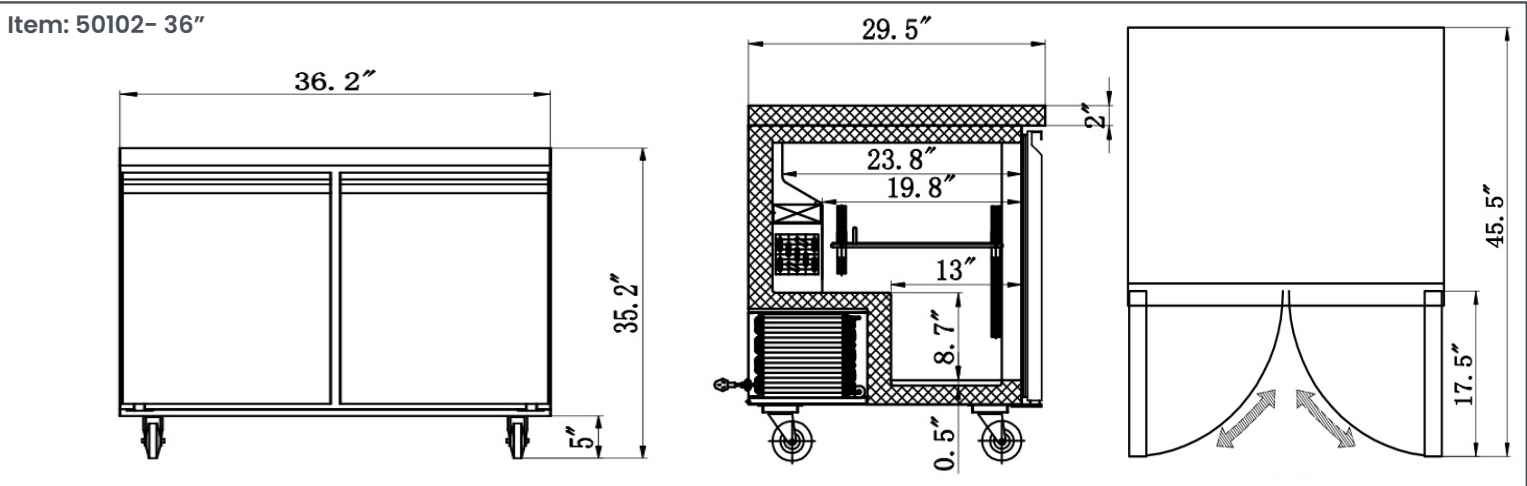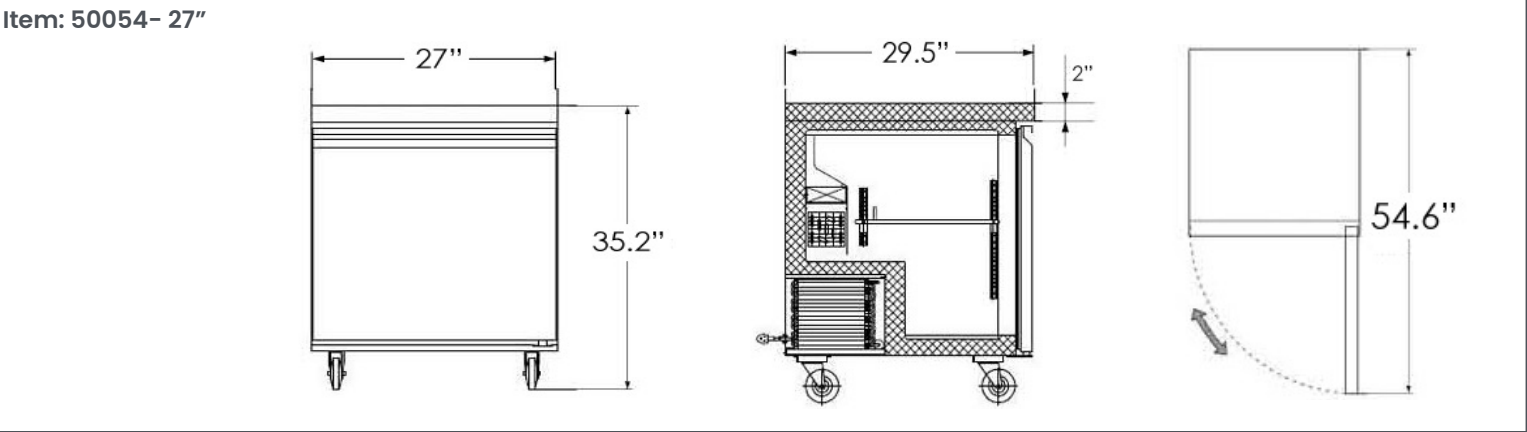

TECHNICAL DRAWING

Item: 50093- 60"

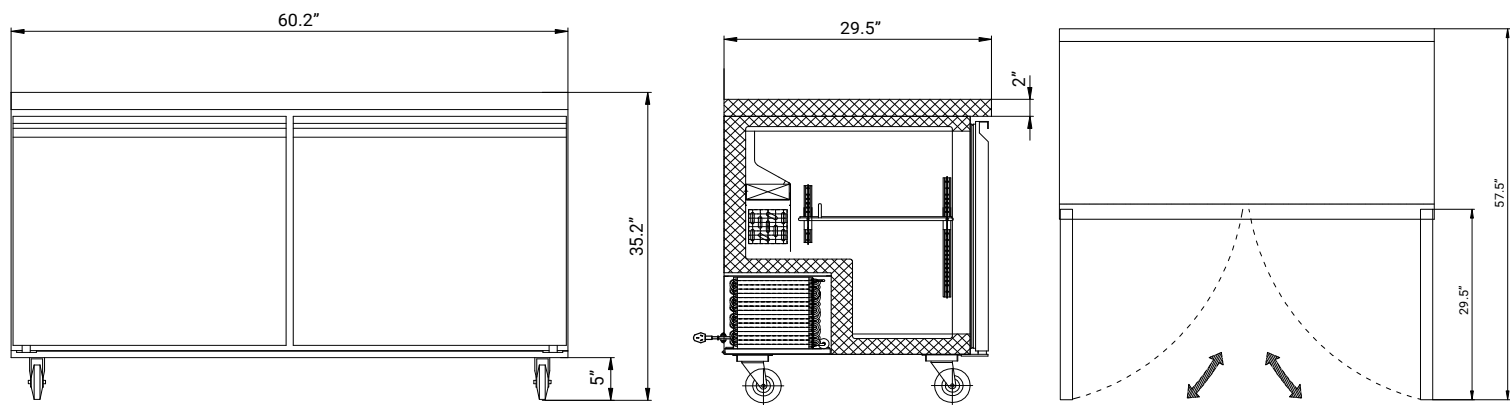

Item: 50091- 72"

