Stainless Steel Refrigerated Salad Bar / Cold Food Table

ITEM:	50089	50090
MODEL:	PT-CN-1524-S-HC	PT-CN-1778-S-HC

Elevate your buffet service with a Salad Bar that offers practicality and durability.

The Omcan refrigerated salad bar is an essential addition to buffets and self-service areas. It comes with a sneeze guard, tray slide, two pan covers, and GN pans. The spacious design includes adjustable full-size pan slots for versatile combinations with a 430 stainless steel exterior and 201 stainless steel interior. Cyclopentane insulation maintains proper temperatures, and eco-friendly R290 refrigerant keeps food efficiently chilled. The tray slide can be positioned on either side, allowing placement against a wall or as an island, with additional slides available upon request.

The clear sneeze guard and basin covers protect food while maintaining visibility. Ample refrigerated storage underneath, with two plastic-coated steel shelves, keeps refills within reach, easily accessible via doors. The unit also includes casters for mobility, a digital controller with automatic defrost, and durable stainless steel construction, making it a practical and efficient solution for any commercial kitchen.

- **Stainless steel construction**
- **Sneeze guard included**
- **Plastic basin cover for contamination protection**
- **GN plastic pans included**
- **Tray slide included**
- **Digital control with auto defrost**
- **Eco-friendly R290 refrigerant**
- **Casters for mobility**



50089 • 60" • 2 Doors



50090 • 72" • 3 Doors

AT A GLANCE

Certification	cETLus • ETL Sanitation
Warranty	2 Year Parts • 2 Year Labor • 5 Year Compressor
Plug Type	NEMA 5-15P / 125V • 15A

Telephone: 1-800-465-0234 Fax: (905) 607-0234 Email: sales@omcan.com Website: www.omcan.com

AUTHORIZED DEALER

Shipped by Freight

cETLus Certified

ETL Sanitation Certified

2 Year Parts Warranty

2 Year Labor Warranty

5 Year Compressor Warranty


NEMA 5-15P Plug Type

TECHNICAL SPECIFICATION

	50089	50090
Capacity	469 L (16.6 cu.ft.)	616 L (21.8 cu.ft.)
Number of Doors	2 Doors	3 Doors
Number of Shelves	2 Plastic Coated Steel Shelves	3 Plastic Coated Steel Shelves
Shelf Capacity	27.4" x 17" (x2) (695 x 434 mm)	21.6" x 17" (x3) (549 x 434 mm)
Power	540 W	534 W
Current	5.4 A	5.5 A
GN Pan Size	12 1/3	15 1/3
GN Pan Covers Included	2 GN Pan Covers	2 GN Pan Covers
Max Depth of Pan	4" (100 mm)	4" (100 mm)
Casters	Yes	Yes
Electrical	110V / 60Hz / 1Ph	110V / 60Hz / 1Ph
Temperature Range	31°F to 33°F (-0.6°C to 0.6°C)	31°F to 33°F (-0.6°C to 0.6°C)
Refrigerant	R290	R290
Insulation Material	Cyclopentane	Cyclopentane
Cooling System	Ventilated	Ventilated
Interior Dimensions (WDH)	56.4" x 19.8" x 20" (1433 x 503 x 507 mm)	66.6" x 19.8" x 20" (1691 x 503 x 507 mm)
Net Weight	341.7 lb (155 kg)	374.8 lb (170 kg)
Net Dimensions (WDH)	60.4" x 29.5" x 34.6" (1535 x 750 x 880 mm)	70.6" x 29.5" x 34.6" (1792 x 750 x 880 mm)
Plug Type	NEMA 5-15 P	NEMA 5-15 P
Certification	cETLus • ETL Sanitation	cETLus • ETL Sanitation
Warranty	2 Year Parts • 2 Year Labor • 5 Year Compressor	2 Year Parts • 2 Year Labor • 5 Year Compressor

TECHNICAL DRAWING

Item: 50089

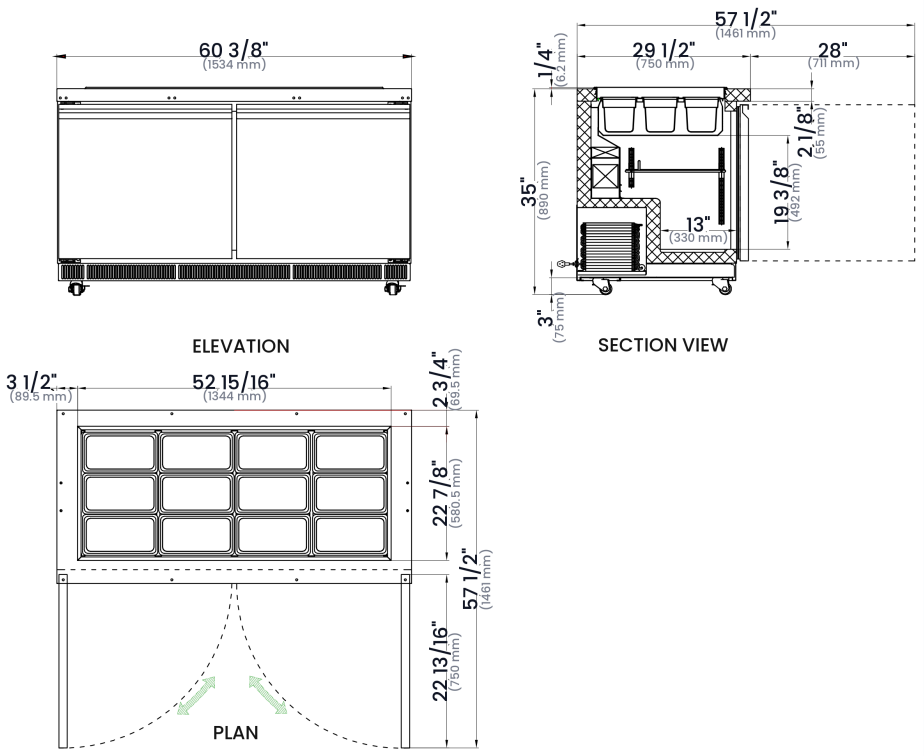

Item: 50090

