



SERVING THE FOOD INDUSTRY SINCE 1951

## Reach in Refrigerator 2 Door Stainless Steel 40" 26 cuft. 115V/60/1 cETLus ETL Sanitation

ITEM: 50110  
MODEL: RE-CN-0035-HC



### Commercial refrigerators designed for high performance and efficiency.

Easily control temperature with the digital temperature controller, sturdy design for long lasting performance.

#### FEATURES:

- Intelligent Digital Temperature Controller
- Monoblock Stable Refrigeration System
- Environment-friendly Refrigerant R290
- Adjustable Shelves
- Internal Round Corner Design
- Pre-installed Casters
- Food Grade 304 Stainless Steel

Telephone: 1-800-465-0234

Fax: (905) 607-0234

Email: [sales@omcan.com](mailto:sales@omcan.com)

Website: [www.omcan.com](http://www.omcan.com)




Authorized Dealer



(Version 2024.07)

Page 1 / 2

## TECHNICAL DRAWING

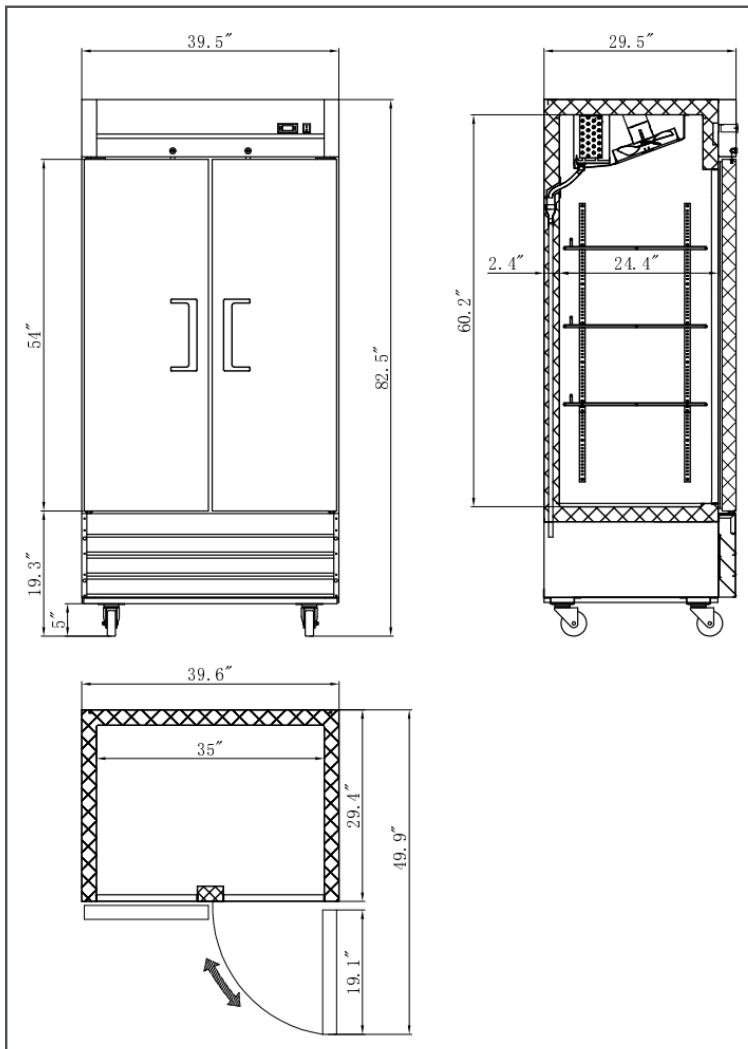

## TECHNICAL SPECIFICATION

Item	50110
Model	RE-CN-0035-HC
Capacity	26.5 cu. ft. (750L)
Maximum Load	88lbs (40kg)
Number of Doors	2 Swing Door
Number of Shelves	6
Shelf Capacity	88lbs (40kg)
Shelf Material	Plastic coated
Number of Casters	4
Power	385 W
Amps	4.1 A
Electrical	115V / 60Hz / 1Ph
Temperature Controller	Digital
Temperature Range	0.5-4.4°C (33 to 40°F)
Refrigerant	R290
Insulation Material	Cyclopentane
Defrosting	Automatic
Cooling System	Forced Air
Interior Dimensions (WDH)	35" x 24.4" x 51.5" (888 x 620 x 1310 mm)
Net Weight	308 lb. (140 kg.)
Net Dimensions (WDH)	39.5" x 29.5" x 82.5" (1004 x 750 x 2095 mm)
Gross Weight	374 lb. (170 kg.)
Gross Dimensions (WDH)	42" x 31.9" x 82.5" (1070 x 810 x 2095 mm)

*BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.*