

Stainless Steel Top-Mount Reach-In Refrigerators

ITEM:	50114	50115	50118	50119
MODEL:	RE-CN-0029-TM	RE-CN-0054-TM	RE-CN-0029G-TM	RE-CN-0054G-TM

Spacious, reliable refrigeration built to handle the demands of your kitchen.

This spacious stainless steel refrigerator is built with lasting quality and designed to meet the demands of busy commercial kitchens. Its sleek exterior is complemented by a wide, ergonomic handle and a self-closing swing door that prevents energy loss. Plastic-coated shelves hold up to 88 lb, while bright LED lighting ensures clear visibility at all times.

The top-mounted compressor allows for efficient cooling performance while keeping the unit accessible and easy to maintain. An automatic defrost system prevents ice build-up and extends the life of the appliance. Available with solid or glass doors in one- and two-door configurations.

- Spacious stainless steel construction
- Sleek design with wide handle
- Self-closing swing doors
- Plastic-coated shelves
- Automatic defrost system
- Bright LED lighting
- Top-mounted compressor
- 4 casters for easy mobility



50114 • 29" • 1 Door



50115 • 54" • 2 Doors



50118 • 29" • 1 Glass Door



50119 • 54" • 2 Glass Doors

AT A GLANCE

Certification

cETLus • ETL Sanitation

Warranty

2 Year Parts • 2 Year Labor • 5 Year Compressor



Telephone: 1-800-465-0234

Fax: (905) 607-0234

Email: sales@omcan.com

Website: www.omcan.com



AUTHORIZED DEALER



Shipped by
Freight



Intertek
cETLus
Certified



Intertek
ETL Sanitation
Certified



2 Year Parts
Warranty



2 Year Labor
Warranty



5 Year
Compressor
Warranty



Embraco
Compressor




NEMA 5-15P
Plug Type


TECHNICAL SPECIFICATION				
Features	50114 29" Solid	50115 54" Solid	50118 29" Glass	50119 54" Glass
Model	RE-CN-0029-TM	RE-CN-0054-TM	RE-CN-0029G-TM	RE-CN-0054G-TM
Capacity	21.5 cu.ft. (609 L)	43.1 cu.ft. (1220 L)	21.5 cu.ft. (609 L)	43.1 cu.ft. (1220 L)
Power	264 W	456 W	288 W	456 W
Current	2.64 A	4.2 A	2.88 A	4.2 A
Number of Doors	1 Swing Door	2 Swing Doors	1 Swing Door	2 Swing Doors
Number of Shelves	3	6	3	6
Shelf Capacity	88 lb (40 kg)	88 lb (40 kg)	88 lb (40 kg)	88 lb (40 kg)
Shelf Dimensions	24.4" x 27" (620 x 688 mm)	24.4" x 27" (620 x 688 mm)	24.4" x 27" (620 x 688 mm)	24.4" x 27" (620 x 688 mm)
Shelf Material	Plastic Coated	Plastic Coated	Plastic Coated	Plastic Coated
Exterior Material	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Number of Casters	4	4	4	4
Electrical	115V / 60Hz / 1Ph	115V / 60Hz / 1Ph	115V / 60Hz / 1Ph	115V / 60Hz / 1Ph
Temperature Controller	Digital	Digital	Digital	Digital
Temperature Range	33°F to 40°F (0.5°C to 4.4°C)	33°F to 40°F (0.5°C to 4.4°C)	33°F to 40°F (0.5°C to 4.4°C)	33°F to 40°F (0.5°C to 4.4°C)
Refrigerant	R290	R290	R290	R290
Max Ambient Temp	100°F (37°C)	100°F (37°C)	100°F (37°C)	100°F (37°C)
Insulation Material	Cyclopentane	Cyclopentane	Cyclopentane	Cyclopentane
Defrosting	Automatic	Automatic	Automatic	Automatic
Cooling System	Forced Air	Forced Air	Forced Air	Forced Air
Interior Dimensions (WDH)	24.4" x 27" x 56" (620 x 688 x 1440 mm)	49.4" x 27" x 56" (1255 x 688 x 1440 mm)	24.4" x 27" x 56" (620 x 688 x 1440 mm)	49.4" x 27" x 56" (1255 x 688 x 1440 mm)
Net Weight	264 lb (119.7 kg)	440 lb (200 kg)	264 lb (119.7 kg)	440 lb (200 kg)
Net Dimensions (WDH)	29" x 32.2" x 81.7" (736 x 818 x 2075 mm)	54" x 32.2" x 81.7" (1371 x 818 x 2075 mm)	29" x 32.2" x 81.7" (736 x 818 x 2075 mm)	54" x 32.2" x 81.7" (1371 x 818 x 2075 mm)
Certification	cETLus ETL Sanitation	cETLus ETL Sanitation	cETLus ETL Sanitation	cETLus ETL Sanitation
Warranty	2 Yr Parts • 2 Yr Labor 5 Yr Compressor	2 Yr Parts • 2 Yr Labor 5 Yr Compressor	2 Yr Parts • 2 Yr Labor 5 Yr Compressor	2 Yr Parts • 2 Yr Labor 5 Yr Compressor

TECHNICAL DRAWING

Item: 50114

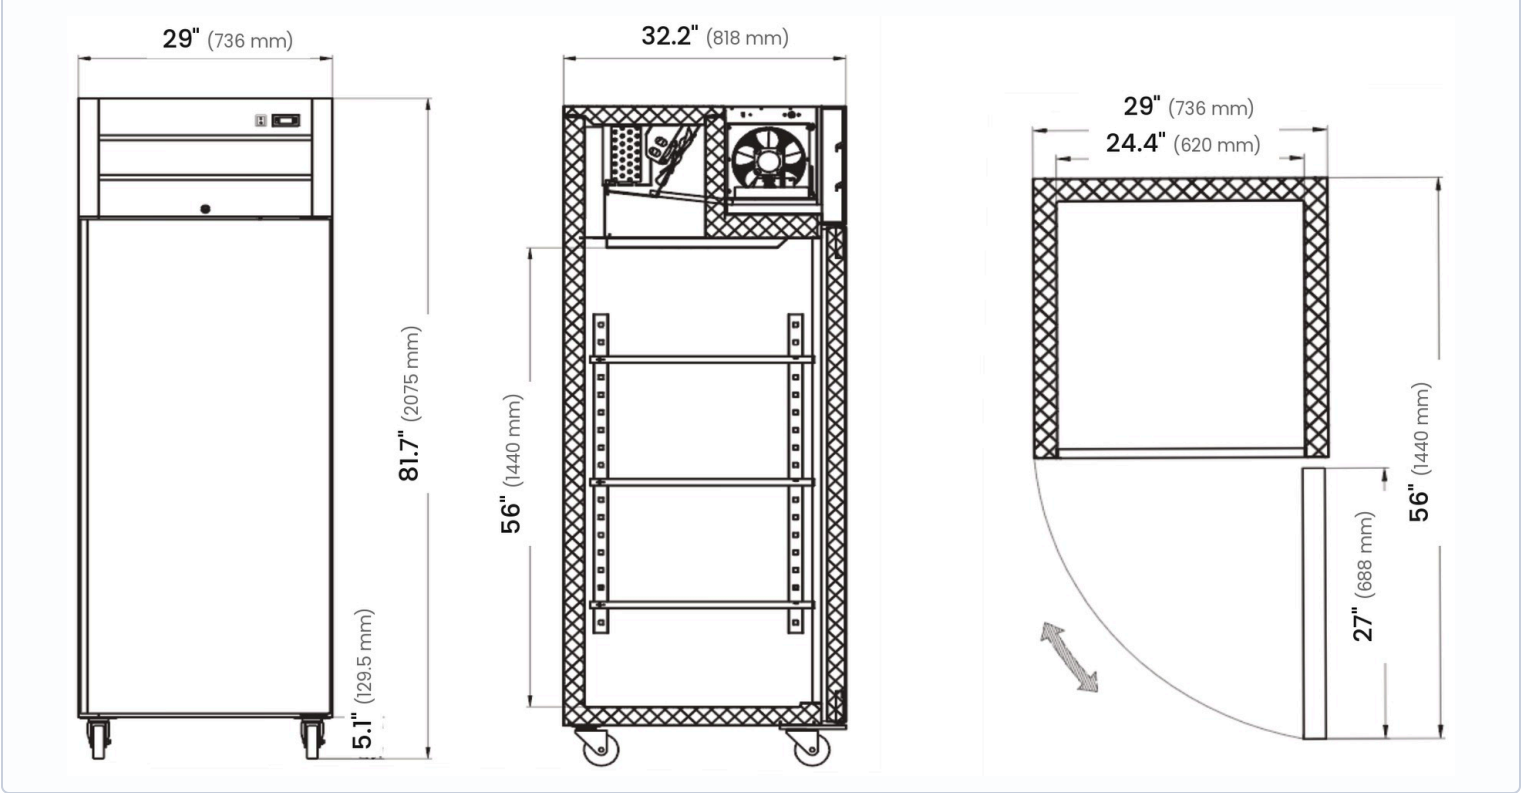


Item: 50115

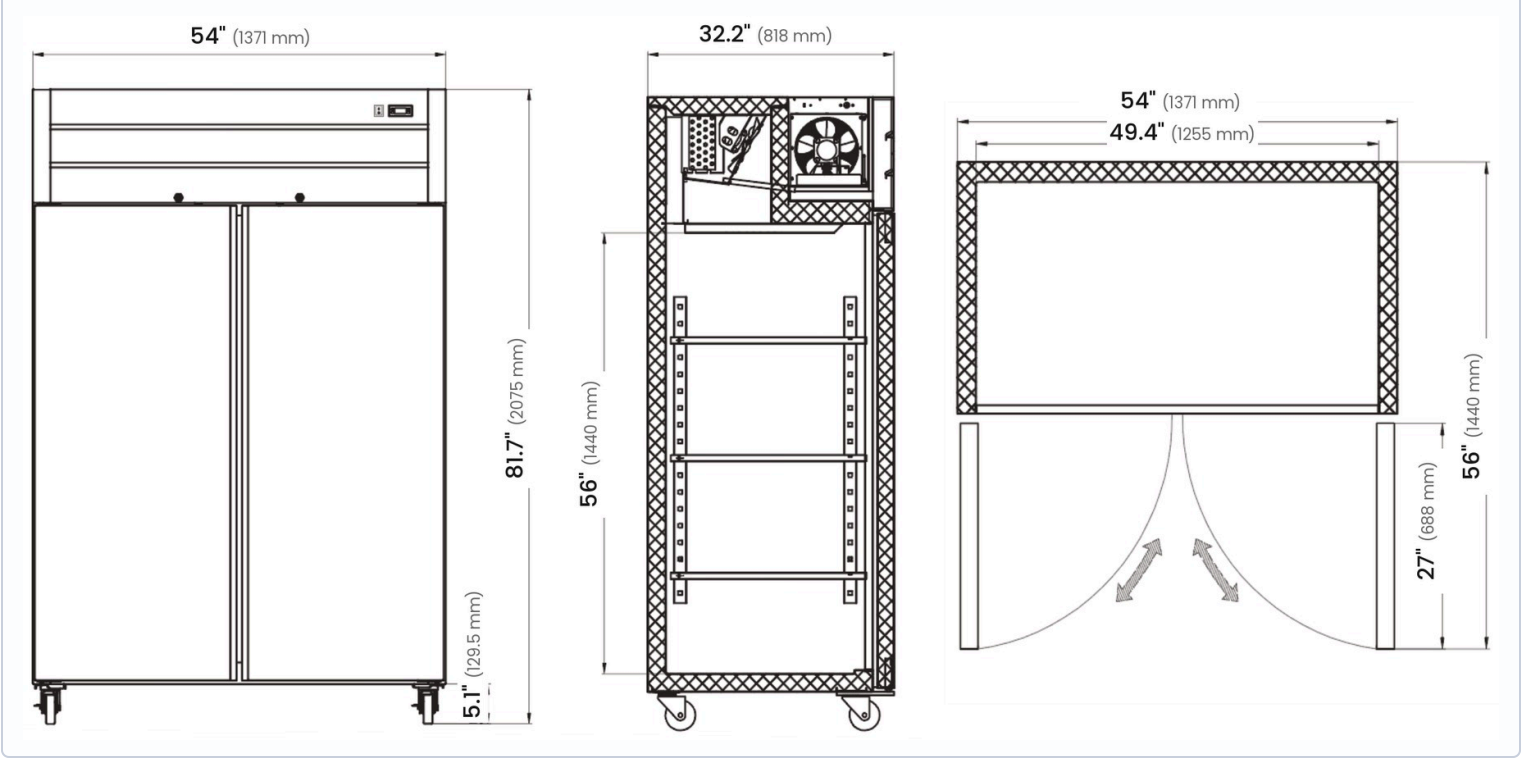

TECHNICAL DRAWING

Item: 50118

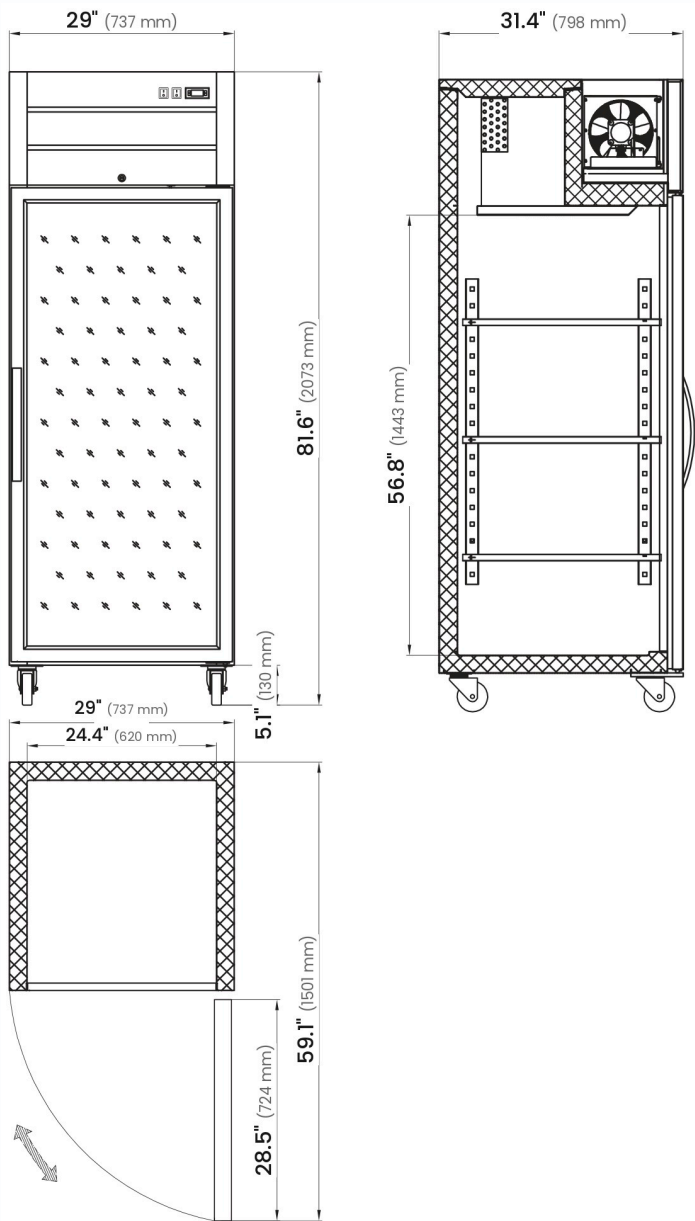

Item: 50119

