

Stainless Steel Top-Mount Reach-In Freezers

ITEM:	50116	50117
MODEL:	FR-CN-0029-TM	FR-CN-0054-TM

The perfect solution for back-of-house freezing and storage.

This spacious stainless steel reach-in freezer is built for lasting durability and designed to meet the demands of busy commercial kitchens. Its sleek design includes a wide handle, high-efficiency components and a self-closing door that helps maintain consistent internal temperatures while reducing energy loss.

Heavy-duty plastic-coated shelves support up to 88 lb each, and the automatic defrost system prevents ice buildup for easier maintenance and a longer lifespan. Bright LED lighting keeps stored items easy to see and organize, and four casters make the unit easy to move for cleaning.

- **Stainless steel construction**
- **Plastic-coated shelves**
- **Self-closing door with wide handle**
- **Automatic defrost**
- **LED lighting system**
- **Top-mounted compressor**
- **Eco-friendly R290 refrigerant**
- **4 casters for easy mobility**



50116 • 29" • 1 Door



50117 • 54" • 2 Doors

AT A GLANCE

Certification	cETLus • ETL Sanitation
Warranty	2 Year Parts • 2 Year Labor • 5 Year Compressor



Telephone: 1-800-465-0234

Fax: (905) 607-0234

Email: sales@omcan.com

Website: www.omcan.com



AUTHORIZED DEALER



Shipped by
Freight



Intertek
cETLus
Certified



Intertek
ETL Sanitation
Certified



2 Year Parts
Warranty



2 Year Labor
Warranty



5 Year
Compressor
Warranty



Embraco
Compressor




NEMA 5-15P
Plug Type

TECHNICAL SPECIFICATION		
Features	50116 • 29" 1 Door	50117 • 54" 2 Doors
Model	FR-CN-0029-TM	FR-CN-0054-TM
Capacity	21.5 cu.ft. (609 L)	43.1 cu.ft. (1220 L)
Power	360 W	720 W
Current	3.6 A	7.2 A
Number of Doors	1 Swing Door	2 Swing Doors
Number of Shelves	3 Shelves	6 Shelves
Shelf Capacity	88 lb (40 kg)	88 lb (40 kg)
Shelf Dimensions	24.4" x 27" (620 x 688 mm)	24.4" x 27" (620 x 688 mm)
Shelf Material	Plastic Coated	Plastic Coated
Exterior Material	Stainless Steel	Stainless Steel
Number of Casters	4	4
Electrical	115V / 60Hz / 1Ph	115V / 60Hz / 1Ph
Temperature Controller	Digital	Digital
Temperature Range	-8°F to 0°F (-22°C to -17°C)	-8°F to 0°F (-22°C to -17°C)
Refrigerant	R290	R290
Max Ambient Temp	100°F (37°C)	100°F (37°C)
Insulation Material	Cyclopentane	Cyclopentane
Defrosting	Automatic	Automatic
Cooling System	Forced Air	Forced Air
Interior Dimensions (WDH)	24.4" x 27" x 56" (620 x 688 x 1440 mm)	49.4" x 27" x 56" (1255 x 688 x 1440 mm)
Net Weight	264 lb (119.7 kg)	440 lb (200 kg)
Net Dimensions (WDH)	29" x 32.2" x 81.7" (736 x 818 x 2075 mm)	54" x 32.2" x 81.7" (1371 x 818 x 2075 mm)
Certification	cETLus • ETL Sanitation	cETLus • ETL Sanitation
Warranty	2 Yr Parts • 2 Yr Labor 5 Yr Compressor	2 Yr Parts • 2 Yr Labor 5 Yr Compressor

TECHNICAL DRAWING

Item: 50116

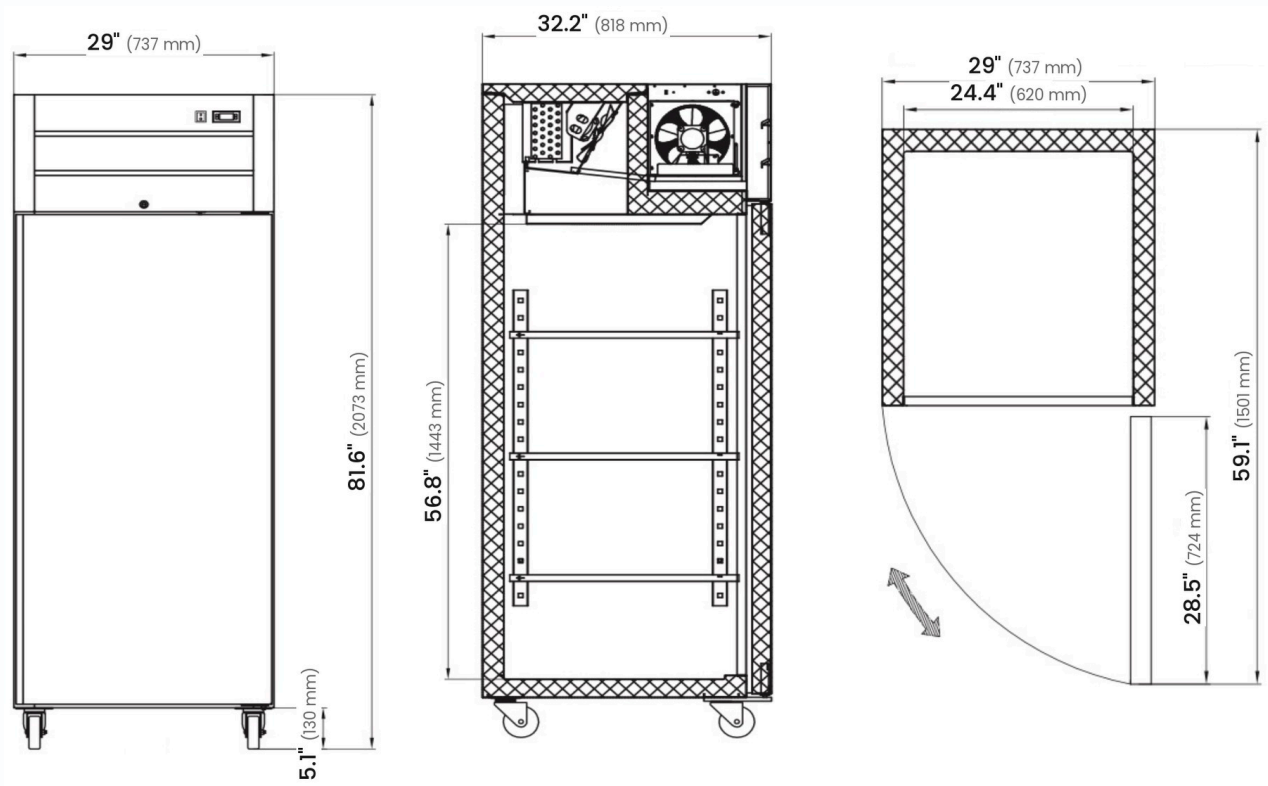

Item: 50117

