



REFRIGERATION

SERVING THE FOOD INDUSTRY SINCE 1951

29" Top Mounted 1 Glass Door Reach-in Refrigerator 115V/60Hz/1Ph cETLus ETL Sanitation Energy Star

ITEM: 50118 MODEL: RE-CN-0029G-TM



Perfect refrigerator for storage and back of house usage.

Spacious stainless steel refrigerator crafted with enduring quality. Sleek design featuring a self closing glass door, high-efficiency components, and a wide handle. Ideal for back of house kitchen operations and storage.

FEATURES:

· 3 Shelves

3 plastic coated shelves with 88lb loading capacity

Energy Star Certified

Energy star certified for economical and environmentally friendly consumption.

• Self Closing Glass Door

Equipped with a self closing door to prevent loss of efficiency from the door being left open accidentally

Automatic Defrost System

The appliance automatically defrosts to avoid ice build-up and lengthens lifespan

LED Lighting System

Our LED system uses a fraction of the energy of regular fluorescent lights and requires no replacement for up seven years.

Telephone: 1-800-465-0234

Fax: (905) 607-0234

Email: sales@omcan.com

Website: www.omcan.com





WARRANTY
2 YEARS PARTS AND LABOUR
5 YEARS ON COMPRESSOR












REFRIGERATION



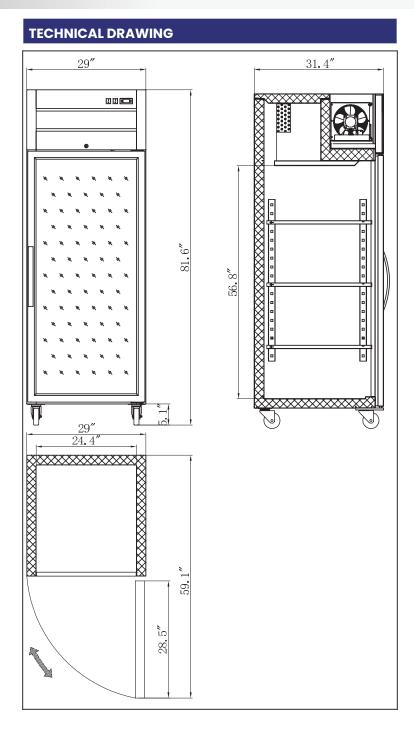

TECHNICAL SPECIFICATION	
Item	50118
Model	RE-CN-0029G-TM
Capacity	21.5 cu. ft. (609 L)
Maximum Load	88 lbs. (40 kg)
Number of Doors	1 Swing Door
Number of Shelves	3
Shelf Size	24.4" x 27" (620 x 688 mm)
Shelf Material	Plastic Coated
Exterior Material	Stainles Steel, Glass
Number of Casters	4
Power	288 W
Amps	2.88 A
Electrical	115V / 60Hz / 1Ph
Temperature Controller	Digital
Temperature Range	0.5 to 4.4°C (33 to 40°F)
Refrigerant	R290
Max Ambient Temp	32 °C (90 °F)
Insulation Material	Cyclopentane
Defrosting	Automatic
Cooling System	Forced Air
Interior Dimensions (WDH)	24.4" x 27" x 56" (620 x 688 x 1440 mm)
Net Weight	264 lb. (119.7 kg.)
Net Dimensions (WDH)	29" x 32.2" x 81.7" (736 x 818 x 2075 mm)
Gross Weight	327.8 lb. (148.7 kg.)
Gross Dimensions (WDH)	30.3" x 34" x 84.4" (770 x 865 x 2145 mm)

BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.