



SERVING THE FOOD INDUSTRY SINCE 1951

54" Top Mounted 2 Glass Door Reach-in Refrigerator 115V/60Hz/1Ph cETLus ETL Sanitation Energy Star

ITEM: 50119
MODEL: RE-CN-0054G-TM



Perfect refrigerator for storage and back of house usage.

Spacious stainless steel refrigerator crafted with enduring quality. Sleek design featuring two self closing doors, high-efficiency components, and a wide handle. Ideal for back of house kitchen operations and storage.

FEATURES:

- **6 Shelves**
6 plastic coated shelves with 88lb loading capacity
- **Energy Star Certified**
Energy star certified for economical and environmentally friendly consumption.
- **Self Closing Glass Doors**
Equipped with self closing doors to prevent loss of efficiency from the door being left open accidentally
- **Automatic Defrost System**
The appliance automatically defrosts to avoid ice build-up and lengthens lifespan
- **LED Lighting System**
Our LED system uses a fraction of the energy of regular fluorescent lights and requires no replacement for up seven years.

Telephone: 1-800-465-0234


Fax: (905) 607-0234

Email: sales@omcan.com


Website: www.omcan.com



Authorized Dealer



TECHNICAL DRAWING

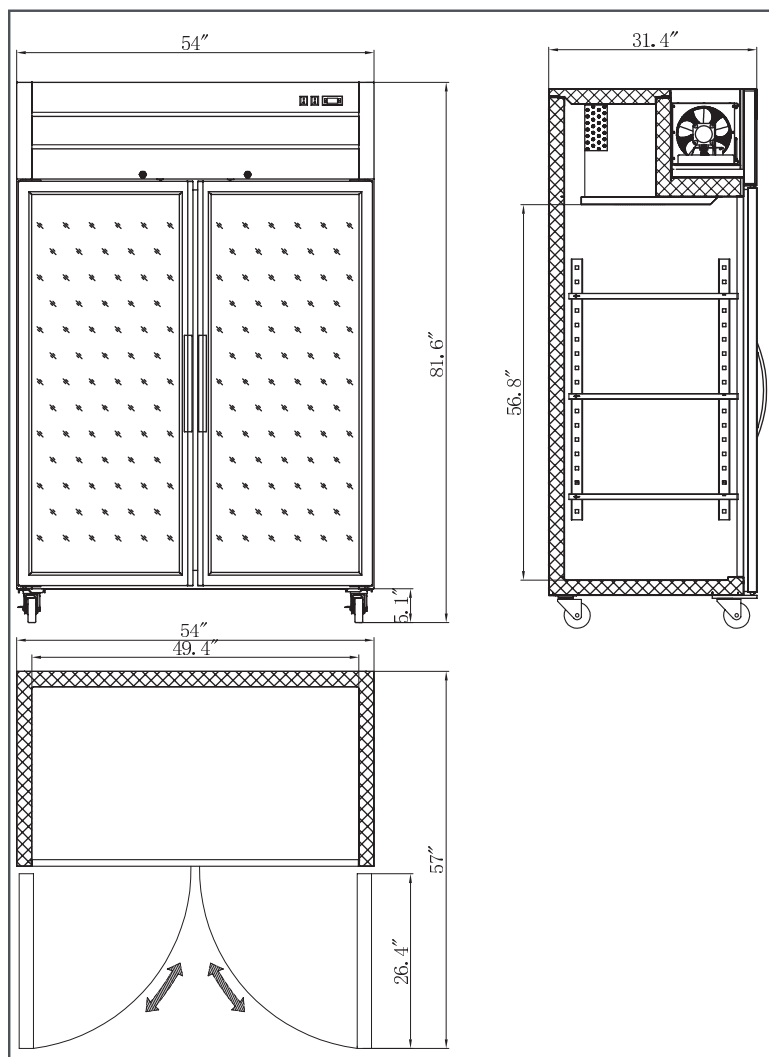

TECHNICAL SPECIFICATION

Item	50119
Model	RE-CN-0054G-TM
Capacity	43.1 cu. ft. (1220 L)
Maximum Load	88 lbs (40kg)
Number of Doors	2 Swing Doors
Number of Shelves	6
Shelf Size	24.4" x 27" (620 x 688 mm)
Shelf Material	Plastic Coated
Exterior Material	Stainless Steel
Number of Casters	4
Power	456W
Amps	4.2A
Electrical	115V / 60Hz / 1Ph
Temperature Controller	Digital
Temperature Range	0.5 to 4.4°C (33 to 40°F)
Refrigerant	R290
Max Ambient Temp	32 °C (90 °F)
Insulation Material	Cyclopentane
Defrosting	Automatic
Cooling System	Forced Air
Interior Dimensions (WDH)	49.4" x 27" x 56" (1255 x 688 x 1440 mm)
Net Weight	440 lb. (200 kg.)
Net Dimensions (WDH)	54" x 32.2" x 81.7" (1371 x 818 x 2075 mm)
Gross Weight	523.6 lb. (237.5 kg.)
Gross Dimensions (WDH)	56.5" x 34" x 84.4" (1435 x 865 x 2145 mm)

BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.