

## Reach In Refrigerator 3 Glass Swing Doors 79" 115V/60Hz/1Ph cETLus ETL Sanitation

ITEM: 50125  
MODEL: RE-CN-79R-HC



### FEATURES:

- **12 Shelves**  
12 plastic coated shelves with 88lb loading capacity
- **Self Closing Glass Doors**  
Equipped with a self closing door to prevent loss of efficiency from the door being left open accidentally
- **Automatic Defrost System**  
The appliance automatically defrosts to avoid ice build-up and lengthens lifespan
- **LED Lighting System**  
Our LED system uses a fraction of the energy of regular fluorescent lights and requires no replacement for up seven years.

### Perfect refrigerator for storage and front of house usage.

Spacious stainless steel refrigerator crafted with enduring quality. Sleek design featuring a self closing glass door, high-efficiency components, and a wide handle. Ideal for front of house operations such as customer convenience.

Telephone: 1-800-465-0234



Fax: (905) 607-0234

Email: [sales@omcan.com](mailto:sales@omcan.com)


Website: [www.omcan.com](http://www.omcan.com)



Authorized Dealer



TECHNICAL DRAWING

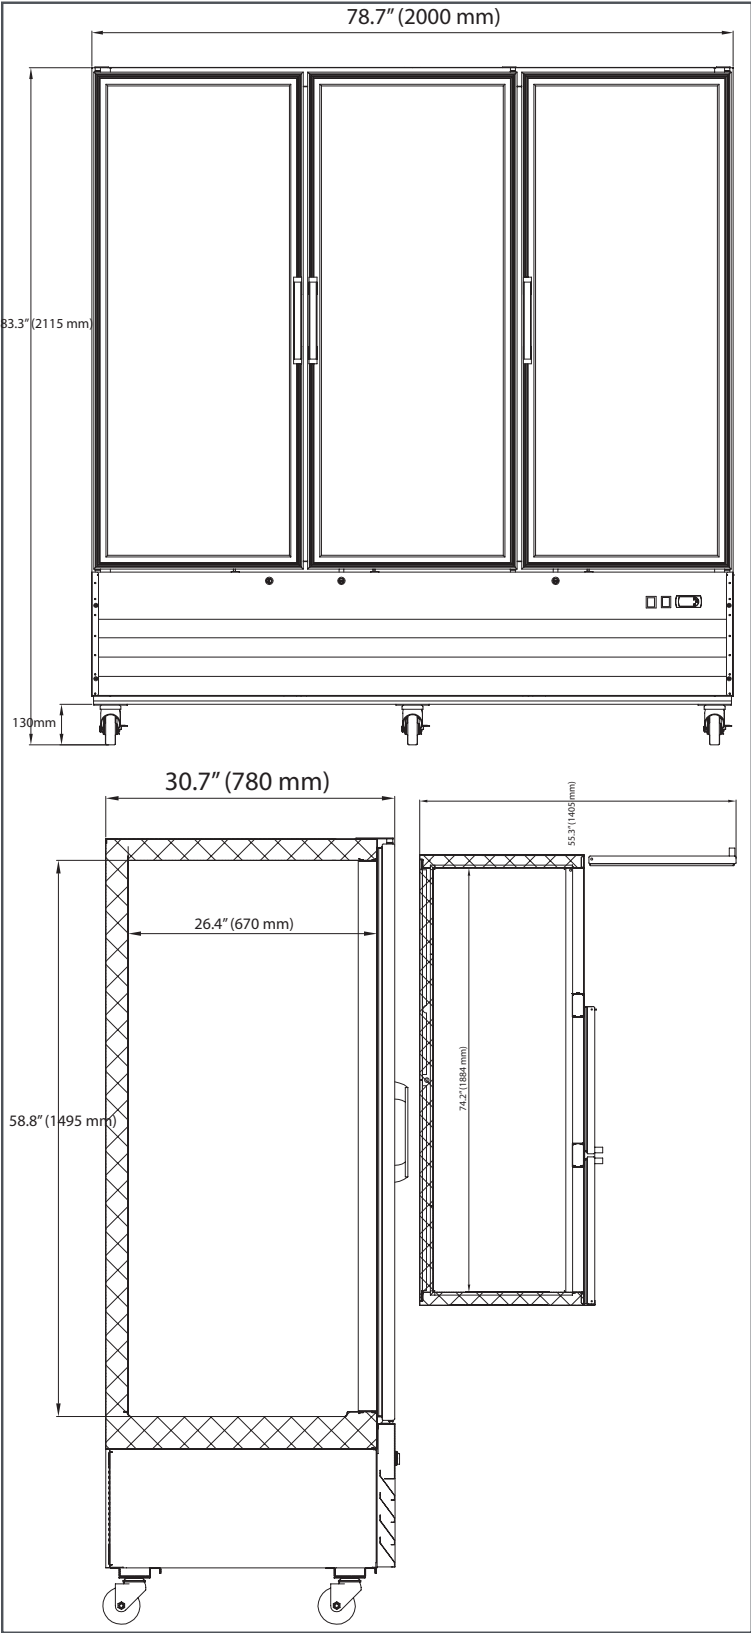

TECHNICAL SPECIFICATION

Item	50125
Model	RE-CN-79R-HC
Capacity	59.5 cu. ft. (1985 L)
Maximum Load	88lbs (40kg)
Number of Doors	3 Swing Doors
Number of Shelves	12
Shelf Capacity	88lbs (40kg)
Shelf Size	25" x 22" (634 x 560 mm)
Shelf Material	Plastic Coated
Exterior Material	Stainles Steel
Number of Casters	6
Power	625 W
Amps	6.9 A
Electrical	115V / 60Hz / 1Ph
Temperature Controller	Digital
Temperature Range	0.5 to 4.4°C (33 to 40°F)
Refrigerant	R290
Max Ambient Temp	26.6 °C (80 °F)
Insulation Material	Cyclopentane
Defrosting	Automatic
Cooling System	Forced Air
Interior Dimensions (WDH)	74.1" x 26.4" x 58.8" (1884 x 670 x 1495 mm)
Net Dimensions (WDH)	78.7" x 30.7" x 82.2" (2000 x 780 x 2088 mm)
Gross Dimensions (WDH)	81.5" x 34.4" x 84.6" (2070 x 875 x 2150 mm)
Net Weight	550 lb. (250 kg.)
Gross Weight	609.4 lb. (276.4 kg.)

BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.