

SERVING THE FOOD INDUSTRY SINCE 1951

Merchandiser Refrigerator 2 Glass Swing Doors White 40" 115V/60Hz/1Ph cETLus ETL Sanitation

ITEM: 50126 MODEL: RE-CN-0039-HC-SW



Perfect refrigerator for merchandise display & customer convenience.

Spacious stainless steel refrigerator crafted with enduring quality. Sleek design featuring a self closing glass door, high-efficiency components, and a wide handle. Ideal for front of house operations such as customer convenience.

FEATURES:

Rounded Corners

Rounded interior corners make it easier to clean inside storage area

Self Closing Glass Doors

Equipped with self closing doors to prevent loss of efficiency from the door being left open accidentally

Automatic Defrost System

The appliance automatically defrosts to avoid ice build-up and lengthens lifespan

LED Lighting System

Our LED system uses a fraction of the energy of regular fluorescent lights and requires no replacement for up seven years.

Telephone: 1-800-465-0234

Fax: (905) 607-0234

Email: sales@omcan.com












WARRANTY

YEARS PARTS AND LABOUR YEARS ON COMPRESSOR Website: www.omcan.com

REFRIGERATION



TECHNICAL DRAWING

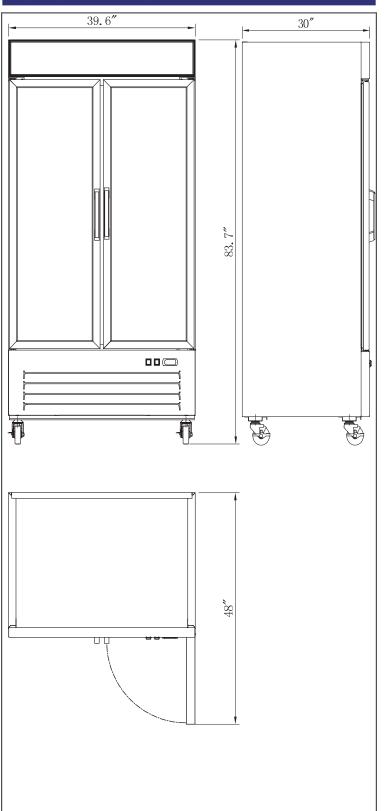

TECHNICAL SPECIFICATION	
Item	50126
Model	RE-CN-0039-HC-SW
Capacity	31.5 cu. ft. (892 L)
Maximum Load	88lbs (40kg)
Number of Doors	2 Swing Doors
Number of Shelves	8
Shelf Capacity	88lbs (40kg)
Shelf Size	25" x 22" (634 x 560 mm)
Shelf Material	Plastic Coated
Exterior Material	Stainles Steel
Number of Casters	4
Power	400 W
Amps	3.7 A
Electrical	115V / 60Hz / 1Ph
Temperature Controller	Digital
Temperature Range	0.5 to 4.4°C (33 to 40°F)
Refrigerant	R290
Max Ambient Temp	26.6 °C (80 °F)
Insulation Material	Cyclopentane
Defrosting	Automatic
Cooling System	Forced Air
Interior Dimensions (WDH)	37" x 26" x 62" (925 x 670 x 1573 mm)
Net Dimensions (WDH)	40" x 30" x 84" (1005 x 760 x 2125 mm)
Gross Dimensions (WDH)	43" x 31" x 85" (1080 x 800 x 2150 mm)
Net Weight	304 lb. (138 kg.)
Gross Weight	342 lb. (155 kg.)

BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.