

SERVING THE FOOD INDUSTRY SINCE 1951

Merchandiser Refrigerator 2 Glass Sliding Doors White 40" 115V/60Hz/1Ph cETLus ETL Sanitation

ITEM: 50127
MODEL: RE-CN-0039-HC-W



Perfect refrigerator for merchandise display & customer convenience.

Spacious stainless steel refrigerator crafted with enduring quality. Sleek design featuring a self closing glass door, high-efficiency components, and a wide handle. Ideal for front of house operations such as customer convenience.

FEATURES:

- **Rounded Corners**
Rounded interior corners make it easier to clean inside storage area
- **Self Closing Glass Doors**
Equipped with self closing doors to prevent loss of efficiency from the door being left open accidentally
- **Automatic Defrost System**
The appliance automatically defrosts to avoid ice build-up and lengthens lifespan
- **LED Lighting System**
Our LED system uses a fraction of the energy of regular fluorescent lights and requires no replacement for up seven years.

Telephone: 1-800-465-0234



Fax: (905) 607-0234

Email: sales@omcan.com


Website: www.omcan.com



Authorized Dealer



TECHNICAL DRAWING

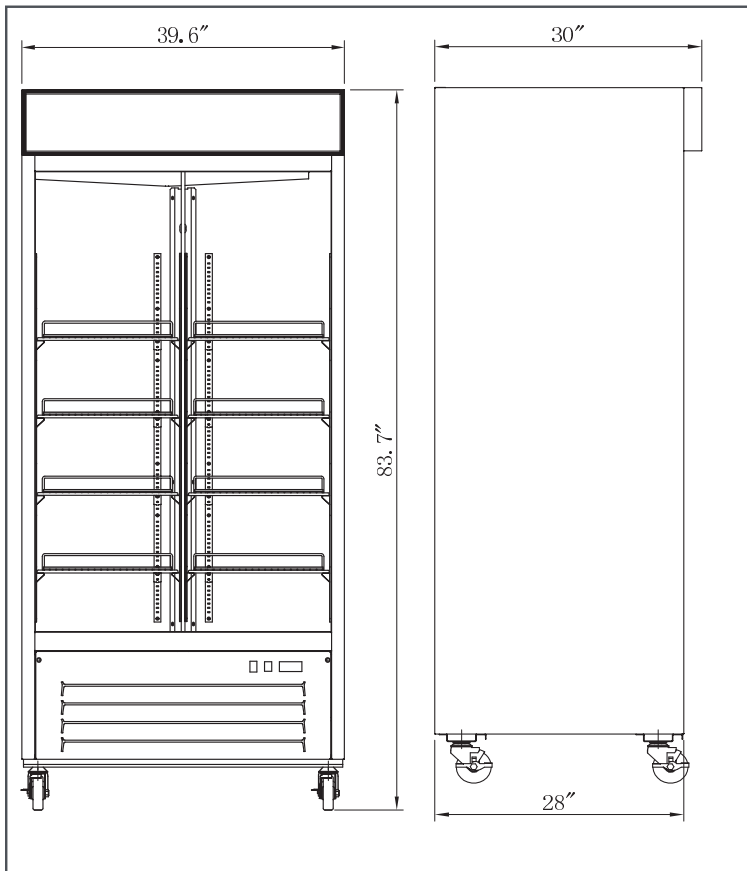

TECHNICAL SPECIFICATION

Item	50127
Model	RE-CN-0039-HC-W
Capacity	31.5 cu. ft. (892 L)
Maximum Load	88lbs (40kg)
Number of Doors	2 Sliding Doors
Number of Shelves	8
Shelf Capacity	88lbs (40kg)
Shelf Size	25" x 22" (634 x 560 mm)
Shelf Material	Plastic Coated
Exterior Material	Stainless Steel
Number of Casters	4
Power	400 W
Amps	3.7 A
Electrical	115V / 60Hz / 1Ph
Temperature Controller	Digital
Temperature Range	0.5 to 4.4°C (33 to 40°F)
Refrigerant	R290
Max Ambient Temp	26.6 °C (80 °F)
Insulation Material	Cyclopentane
Defrosting	Automatic
Cooling System	Forced Air
Interior Dimensions (WDH)	37" x 26" x 62" (925 x 670 x 1573 mm)
Net Dimensions (WDH)	40" x 30" x 84" (1005 x 760 x 2125 mm)
Gross Dimensions (WDH)	43" x 31" x 85" (1080 x 800 x 2150 mm)
Net Weight	304 lb. (138 kg.)
Gross Weight	342 lb. (155 kg.)

BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.