

SERVING THE FOOD INDUSTRY SINCE 1951

## Merchandiser Refrigerator 2 Glass Swing Doors Black 40" 115V/60Hz/1Ph cETLus ETL Sanitation

ITEM: 50128  
MODEL: RE-CN-0039-HC-SB



### Perfect refrigerator for merchandise display & customer convenience.

Spacious stainless steel refrigerator crafted with enduring quality. Sleek design featuring a self closing glass door, high-efficiency components, and a wide handle. Ideal for front of house operations such as customer convenience.

#### FEATURES:

- **Rounded Corners**

Rounded interior corners make it easier to clean inside storage area

- **Self Closing Glass Doors**

Equipped with self closing doors to prevent loss of efficiency from the door being left open accidentally

- **Automatic Defrost System**

The appliance automatically defrosts to avoid ice build-up and lengthens lifespan

- **LED Lighting System**

Our LED system uses a fraction of the energy of regular fluorescent lights and requires no replacement for up seven years.

Telephone: 1-800-465-0234



Fax: (905) 607-0234

Email: sales@omcan.com


Website: www.omcan.com



Authorized Dealer



## TECHNICAL DRAWING

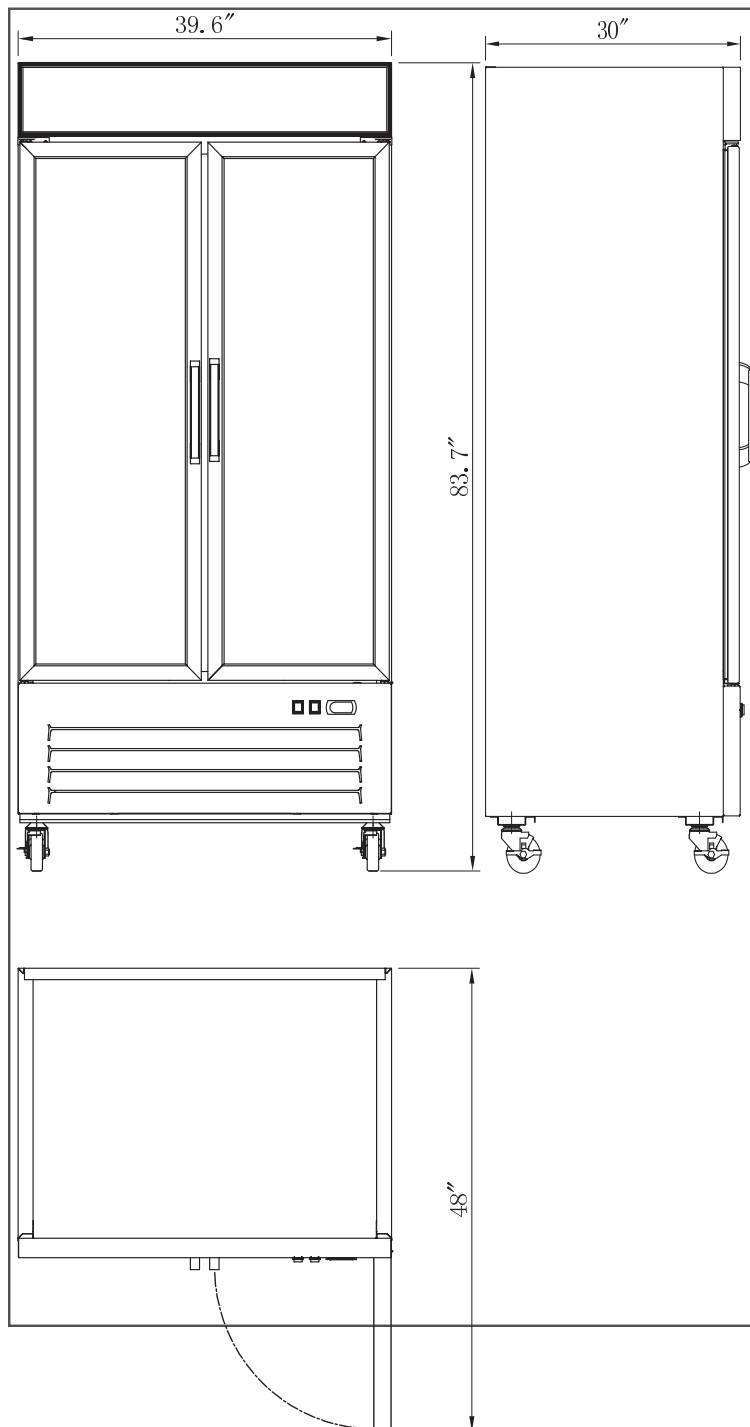

## TECHNICAL SPECIFICATION

|                           |   |
|---------------------------|---|
| Item                      | 50128                                     |
| Model                     | RE-CN-0039-HC-SB                          |
| Capacity                  | 31.5 cu. ft. (892 L)                      |
| Maximum Load              | 88lbs (40kg)                              |
| Number of Doors           | 2 Swing Doors                             |
| Number of Shelves         | 8   |
| Shelf Capacity            | 88lbs (40kg)                              |
| Shelf Size                | 25" x 22" (634 x 560 mm)                  |
| Shelf Material            | Plastic Coated                            |
| Exterior Material         | Stainless Steel                           |
| Number of Casters         | 4   |
| Power                     | 400 W                                     |
| Amps                      | 3.7 A                                     |
| Electrical                | 115V / 60Hz / 1Ph                         |
| Temperature Controller    | Digital                                   |
| Temperature Range         | 0.5 to 4.4°C (33 to 40°F)                 |
| Refrigerant               | R290                                      |
| Max Ambient Temp          | 26.6 °C (80 °F)                           |
| Insulation Material       | Cyclopentane                              |
| Defrosting                | Automatic                                 |
| Cooling System            | Forced Air                                |
| Interior Dimensions (WDH) | 37" x 26" x 62"<br>(925 x 670 x 1573 mm)  |
| Net Dimensions (WDH)      | 40" x 30" x 84"<br>(1005 x 760 x 2125 mm) |
| Gross Dimensions (WDH)    | 43" x 31" x 85"<br>(1080 x 800 x 2150 mm) |
| Net Weight                | 304 lb. (138 kg.)                         |
| Gross Weight              | 342 lb. (155 kg.)                         |

BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.