



Grease Trap with 50 lbs. capacity

TEM: 48140



Prevent grease from entering into plumbing system, septic fields, and wastewater facilities.


These grease traps are built to last; made from 11-gauge cold rolled steel with an oven-cured and acid-resistant baked gray epoxy coating. Ideal use for cooking or prep sinks, pot sinks, or commercial dishwashers in various types of commercial food service operations. It may be recess-mounted or floor-mounted.

FEATURES:

- 11-gauge cold rolled steel with an oven-cured and acid-resistant baked gray epoxy coating
- 25 GPM flow rate
- 50 lb. grease capacity
- threaded inlet & outlet



TECHNICAL DRAWING

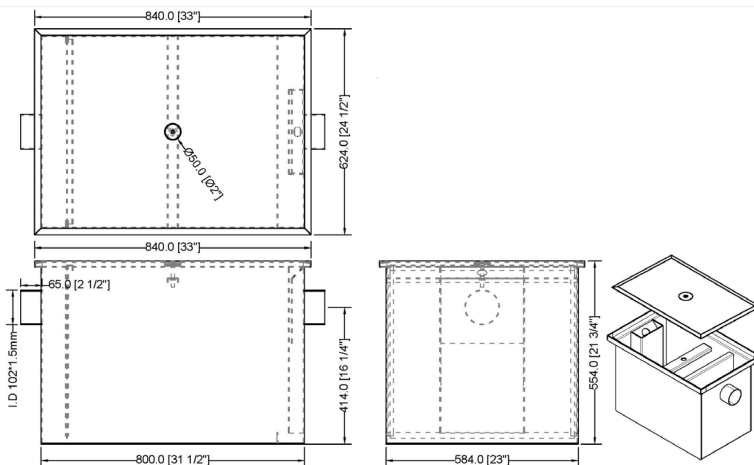

TECHNICAL SPECIFICATION

Item	48140
Grease Capacity	50 lb. (23 kg.)
Flow Rate (Gallons per Min.)	25Gal/min (94.6 L/min)
Threaded Inlet & Outlet Size	3"
Net Weight	38 lb. (17 kg.)
Net Dimensions (WDH)	26" x 16.5" x 16.5" (660 x 419 x 419 mm)
Gross Weight	100 lb. (45 kg.)
Gross Dimensions (WDH)	30" x 20" x 20" (762 x 508 x 508 mm)

