



SERVING THE FOOD INDUSTRY SINCE 1951

Grab and Go Open Refrigerated Floor Self-Serve Display

ITEM: 48265
MODEL: RS-CN-0530-B

48266
RS-CN-0700-B

48269
RS-CN-1050-B

36" (48265)

48" (48266)

72" (48269)



Keep foods fresh and in customer-view with this high-performance open refrigerated floor display case.

A great addition to your establishment; providing convenience for customers to easily access merchandise. This open refrigerated display is equipped with a night curtain, which helps in reducing power consumption when not in use. The bright internal LED lighting complements the attractive finish and provides greater visibility for your displayed product. The adjustable shelf position is great for merchandising your products to your liking. It comes complete with digital temperature controls for accuracy and always fresh foods. This attractively designed display case was made to maximize space for cafes, restaurants, supermarkets and convenience stores. Use it to display dairy products, vegetables, fruits, and drinks.

Telephone: 1-800-465-0234



Fax: (905) 607-0234

Email: sales@omcan.com


Website: www.omcan.com



Authorized Dealer



TECHNICAL DRAWING

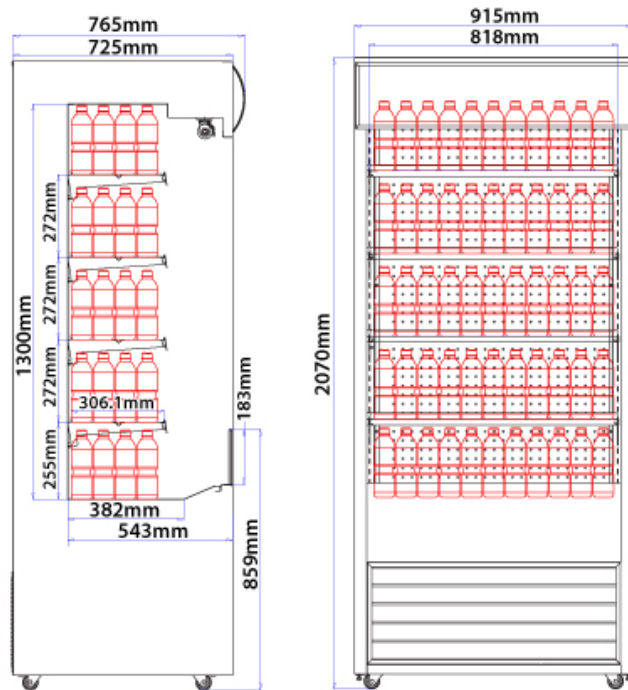


Item 43459 /48265

TECHNICAL SPECIFICATION

Item	48265
Model	RS-CN-0530-B
Capacity	18.71 cu. ft. (530L)
Shelf Load Capacity	55.1 lbs (25kg)
Number of Shelves	5
Number of Casters	4
Power	1700 W
Amps	16 A
Electrical	110V / 60Hz / 1Ph
Temperature Controller	Digital
Temperature Range	2 to 10°C (35.6 to 50°F)
Refrigerant	R290
Type Of Climate	3
Insulation Material	Cyclopentane
Defrosting	Automatic
Cooling System	Forced Air
Net Dimensions (WDH)	36" x 30.1" x 81.5" (915 x 765 x 2070 mm)
Gross Dimensions (WDH)	40" x 33.5" x 87.8" (1015 x 850 x 2230 mm)
Net Weight	335.1 lb. (152 kg.)
Gross Weight	388 lb. (176 kg.)

BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.

TECHNICAL DRAWING

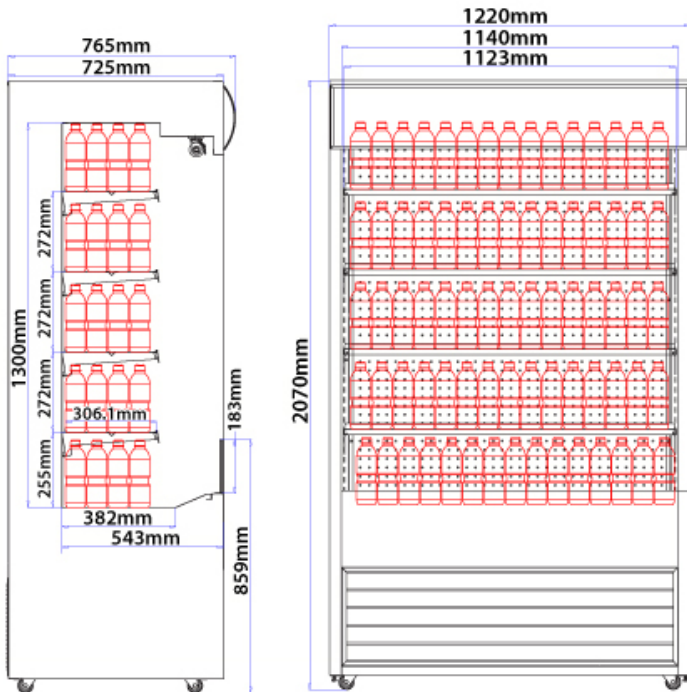


Item 41469 /48265

TECHNICAL SPECIFICATION

Item	48266
Model	RS-CN-0700-B
Capacity	24.72 cu. ft. (700L)
Shelf Load Capacity	66.1 lbs (30kg)
Number of Shelves	5
Number of Casters	4
Power	2550 W
Amps	12.1 A
Electrical	220V / 60Hz / 1Ph
Temperature Controller	Digital
Temperature Range	2 to 10°C (35.6 to 50°F)
Refrigerant	R290
Type Of Climate	3
Insulation Material	Cyclopentane
Defrosting	Automatic
Cooling System	Forced Air
Net Dimensions (WDH)	48" x 30.1" x 81.5" (1220 x 765 x 2070 mm)
Gross Dimensions (WDH)	52" x 33.5" x 87.8" (1320 x 850 x 2230 mm)
Net Weight	426.6 lb. (193.5 kg.)
Gross Weight	486.1 lb. (220.5 kg.)

BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.

TECHNICAL DRAWING

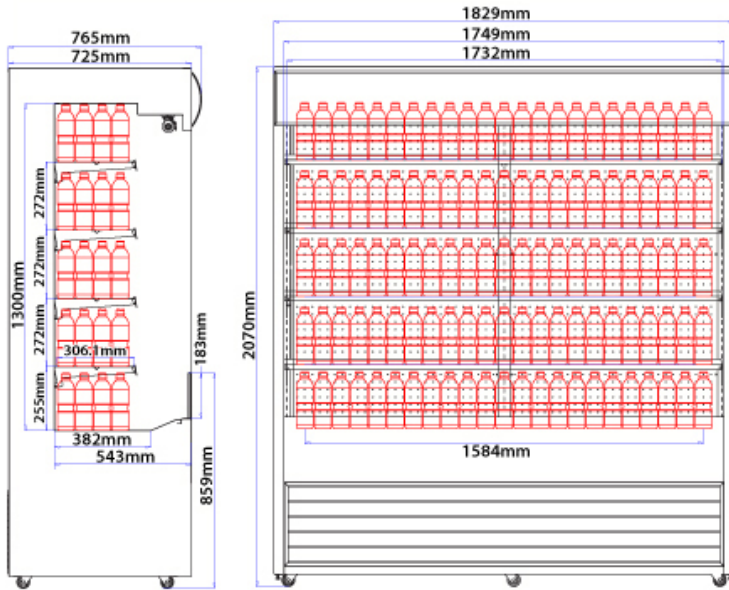

Item 43460 /48269

TECHNICAL SPECIFICATION

Item	48269
Model	RS-CN-1050-B
Capacity	37.08 cu. ft. (1050L)
Shelf Load Capacity	110.2 lbs (50kg)
Number of Shelves	5
Number of Casters	4
Power	2400 W
Amps	11.5 A
Electrical	220V / 60Hz / 1Ph
Temperature Controller	Digital
Temperature Range	2 to 10°C (35.6 to 50°F)
Refrigerant	R290
Type Of Climate	3
Insulation Material	Cyclopentane
Defrosting	Automatic
Cooling System	Forced Air
Net Dimensions (WDH)	72" x 30.1" x 81.5" (1829 x 865 x 2070 mm)
Gross Dimensions (WDH)	76" x 33.5" x 87.8" (1930 x 850 x 2230 mm)
Net Weight	565.5 lb. (256.5 kg.)
Gross Weight	652.6 lb. (296 kg.)

BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.