



Glass Door Refrigerators

ITEM : 59032 59033
 MODEL : RE-CN-0045E-HC RE-CN-0009E-HC



59032




59033

Efficient and Eco-Friendly Aurora Glass Door Refrigerators.



With their spacious working area, these refrigerated prep tables give you room to store extra ingredients as well. They use Hydro-Carbon R290 refrigerant which is environmentally friendly and more efficient.

FEATURES:

- ✓ Large capacity can display a variety of food and beverages for customers.
- ✓ Stainless steel interior and exterior, aluminum back
- ✓ CFC free refrigerant and foam
- ✓ Digital temperature controller and LCD display (Carel)
- ✓ Ventilated, automatic defrosting and evaporation of condensation water
- ✓ Adjustable heavy-duty PVC coated shelves
- ✓ Uses Hydro-Carbon R290 refrigerant which is environmentally friendly and more efficient

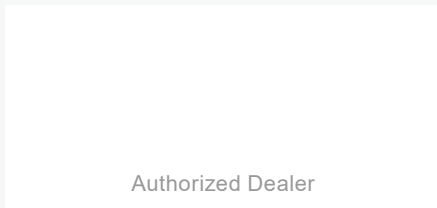


Authorized Dealer



TECHNICAL DRAWING

59033

59032

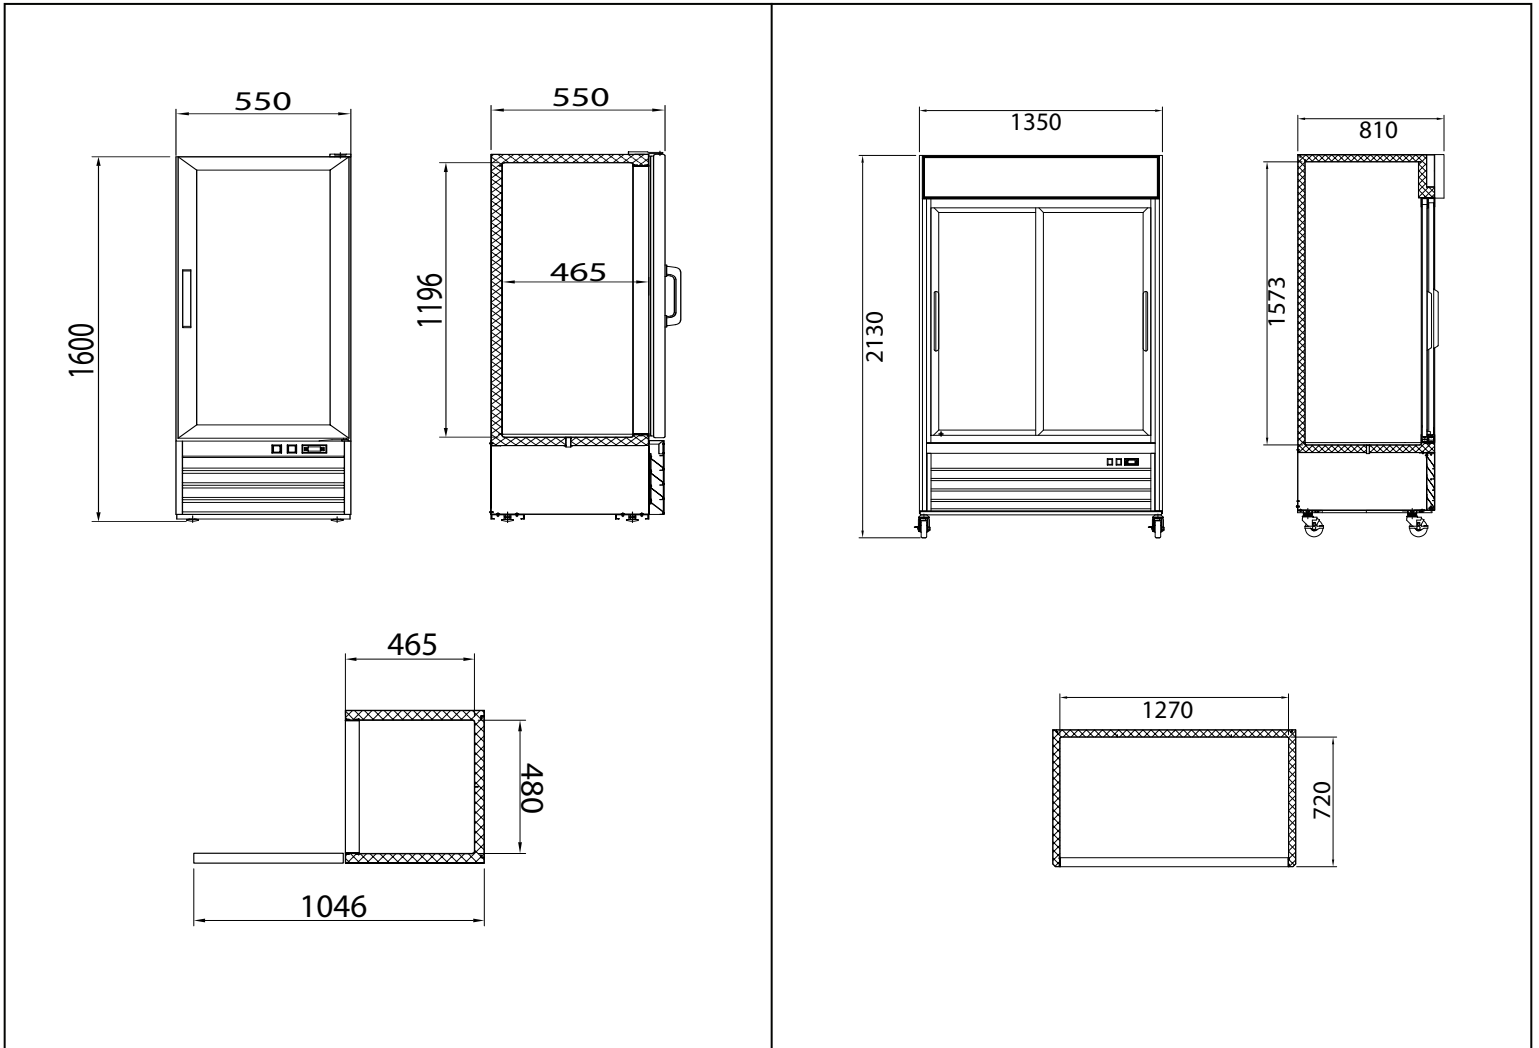

*measurements in diagrams are in mm.

TECHNICAL SPECIFICATION

Features	22-inch Glass Door with 8.5 cu.ft (240 L) Capacity	54-inch 2 Sliding Glass Doors with 45 cu.ft. (1274 L) Capacity
Item	59033	59032
Model	RE-CN-0009E-HC	RE-CN-0045E-HC
Capacity	8.5 cu. ft / 240 L	45 cu. ft / 1274 L
Temperature Range	0.5°C - 5°C / 33°F - 41°F	0.5°C - 5°C / 33°F - 41°F
Refrigerant	R290	R290
Electrical	110V / 60Hz / 1Ph	110V / 60Hz / 1Ph
Power	186W	249W
Amps	2.9A	4.3A
Insulation Material	Cyclopentane	Cyclopentane
Cooling System	Ventilated	Ventilated
Defrosting	Automatic	Automatic
Number of Door	1	2
Self-closing Door	YES	YES
Number of Shelves	4	8
Shelf Material	Plastic Coated	Plastic Coated
Shelf Loading Capacity (Per PC)	88.2 lbs / 40 kg	88.2 lbs / 40 kg
Net Dimensions (with Wheels)	18.9" x 18.3" x 46" 480 x 465 x 1168 mm	53.2" x 31.8" x 84" 1351 x 807 x 2133 mm
Net Weight	189.5 lbs / 86 kg	436.5 lbs / 198 kg
Gross Dimensions	23.6" x 24.8" x 69.1" 599 x 630 x 1755 mm	56" x 33.5" x 84.6" 1422 x 850 x 2148 mm
Gross Weight	102 lbs / 224.8 kg	218 lbs / 480.6 kg

** This equipment is intended for indoor environment using where ambient temperature do not exceed 24°C (75°F) & 55% relative humidity.