



DISHWASHER

SERVING THE FOOD INDUSTRY SINCE 1951

UPRIGHT KROMO DISHWASHER HEAVY DUTY

Item: 49128 | Model: CD-IT-130-HDPREMIUM



THE EVOLUTION OF TRADITION

Dishwashing machine built with fully double insulated hood, completely deep-formed, designed for being silent and reliable.

FEATURES

- Double insulated hood
- 5 wash cycles
- Three-phase machine
- Wash and rinse temperatures displayed
- Built-in rinse-aid dispenser
- Split wash and rinse arms
- Deep-formed tank
- Self-cleaning vertical pump
- Standard drain pump
- Break Tank system to prevent backflow contaminations in the piping network
- User-friendly multichromatic START key
- Electronic control panel with LCD screen
- Language selection and menu personalization
- Self-diagnostic system for users and service staff
- PLUS SYSTEM to grant a constant rinse temperature and pressure
- Detergent dispenser



WARRANTY

PARTS AND LABOR




Must be installed by a certified electrician.



Authorized Dealer

TECHNICAL DRAWING

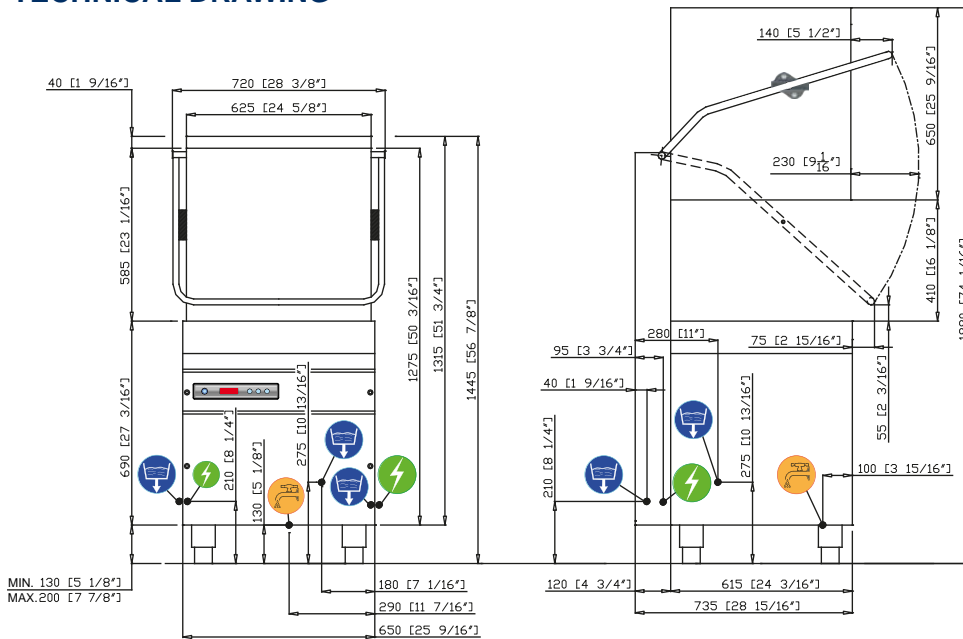

| | |
|--|--------------------------------|
| | WATER CONNECTION 3/4" G |
| | DRAINING 15/16 inch |
| | ELECTRICAL SUPPLY |

BARE WIRE Must be installed by a certified electrician.

TECHNICAL SPECIFICATIONS

| ITEM | 49128 | DIMENSIONS (WDH) | 28 3/8" x 28 15/16" x 56 7/8" 74 1/16" Height (open hood) |
|--|--|--|--|
| MODEL | CD-IT-130-HDPREMIUM | WEIGHT | 253.5 lbs |
| CROCKERY DIMENSIONS | PLATES: 16 1/8" dia TRAY MAX: Gastronorm 1/1 (20 7/8" x 12 3/4") | WATER CONSUMPTION / CYCLE (water pressure 200kPa) | 0.69 gal |
| RACK DIMENSIONS | 20" x 20" | BOOSTER CAPACITY | 3.96 gal |
| RACK EQUIPMENT | (2) PLASTIC PLATES BASKET (1) LARGE MESH GLASS BASKET (2) CUTLERY BASKET | BOOSTER HEATING ELEMENT | 9 kW |
| ELECTRICAL | 220-240V / 60Hz / 3Ph | RINSING TEMPERATURE (SET) | 185°F |
| POWER REQUIRED | 10.75 kW | TANK CAPACITY | 11.1 gal |
| WATER HARDNESS | 2-8 °F | TANK HEATING ELEMENT | 2.7 kW |
| INLET WATER PRESSURE | 25 - 95 PSI (170-620 kPa) | TANK TEMPERATURE (SET) | 160°F |
| WASHING CYCLES (sec) | 1 (120) 2 (180) 3 (240) 4 (300) 5 (360) | PUMP POWER | 1.75 kW |
| WATER SUPPLY 131 °F RACKS/H (*) (°) | 30 20 15 12 10 | DRAIN PUMP | 43W hMAX 31 1/2" (10.78 gal) |
| WATER SUPPLY 50 °F RACKS/H (*) (°) | 20 20 15 12 10 | NOISE | 66,430.7 dB(A) |

(*) STANDARD THERMOSTOP

(***) MAXIMUM FLOW RATE

1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

OMCAN INC.

Telephone: 1-800-465-0234

Fax: (905) 607-0234

Email: sales@omcan.com

Website: www.omcan.com



Follow us to keep up to date with the latest news and offers

