



ELITE SERIES REFRIGERATION

SERVING THE FOOD INDUSTRY SINCE 1951

19.2 CU. FT. ONE-SWING DOOR REFRIGERATION

Model: G319 HC Item: 45445

*Energy efficient environmentally friendly,
featuring spark-free components, low refrigerant
charge and the most attractive prodcut display*



KEY FEATURES

- **Electronic Temperature Controller**
Assures the optimal performance of the cooler, delivering product temperature ideal for consumption.
- **Electronic Fan Motors**
Enhances performance and efficiency. Uses only a fraction of the energy than industry standard shaded-pole motor requires. Longer lifespan fan motor.
- **Newly Designed Condenser**
New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.
- **LED Efficiency 220 lux Minimum Output**
New 5th generation constant power ultra-high efficiency LED uses lowest energy possible, with highest light output.
- **Spark-Free Refrigeration Components**
All HC models will have a spark-free refrigeration components for optimal safety, per UL requirements.



Establishing a NEW STANDARD in the commercial refrigeration industry.



COMMERCIAL REFRIGERATOR
AND/OR FREEZER
9242



NSF/ANSI 7 COMMERCIAL REFRIGERATOR
AND/OR FREEZER
20YY






Authorized Dealer

ELITE SERIES REFRIGERATION

11.5 CU. FT. SWING DOOR REFRIGERATION



PRODUCT DIMENSION

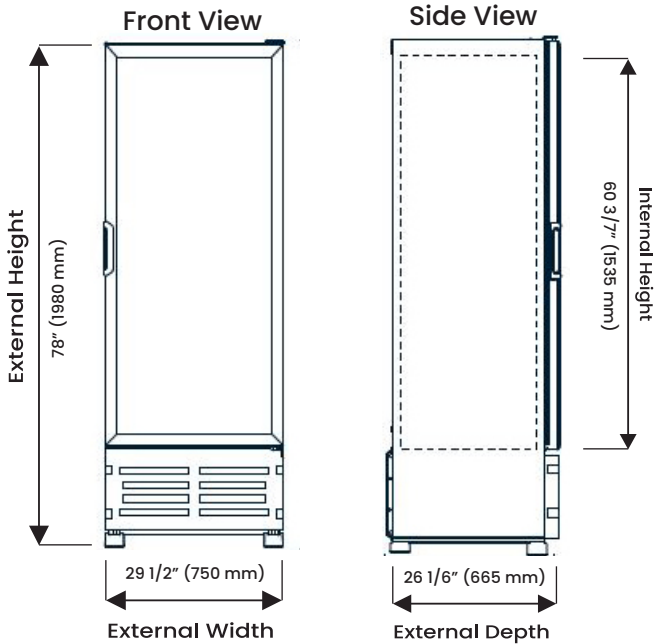

Human scale

TECHNICAL SPECIFICATIONS

ITEM NUMBER	45445
MODEL	G319 HC
DESCRIPTION	19.2 cu.ft. One-Swing Door Refrigeration
VOLUME	543.6 L / 19.2 cu. ft.
REFRIGERANT	R290 2.29 oz.
NUMBER OF DOORS	1
NUMBER OF SHELVES	5
SHELF SIZE	24.8" x 19.6" / 630 x 497 mm
CAPACITY	20 oz. / 240 12 oz. / 630
TEMPERATURE RANGE	0 - 7°C / 32 - 44.6°F
THERMOSTAT SETTING DEFAULT	Cut-Out: 0°C / 32°F Cut-In: 7°C / -44.6°F
MAX AMBIENT TEMP RATING	32°C / 90°F
ENERGY CONSUMPTION	1.8 kWh/day*
ELECTRICAL	115V / 60Hz / 1Ph
POWER	1/4HP
CURRENT	5.2 Amps
WEIGHT	223.8 lbs / 101.5 kg
GROSS WEIGHT	240.5 lbs / 109.1 kg
INTERIOR DIMENSIONS (DWH)	21 2/3" x 25 1/2" x 60 3/7" 550 x 648 x 1535 mm
EXTERIOR DIMENSIONS (DWH)	26 1/6" x 29 1/2" x 78" 665 x 750 x 1980 mm
GROSS DIMENSIONS (DWH)	31 1/2" x 33 6/7" x 81 1/2" 800 x 860 x 2070 mm


* Energy consumption based on ANSI/ASHRAE Standard 72-2005.



COMMERCIAL REFRIGERATOR
AND/OR FREEZER
9242



NSF/ANSI 7 COMMERCIAL REFRIGERATOR
AND/OR FREEZER
20YY



LIMITED WARRANTY

3 YEAR PARTS AND LABOR
5 YEARS PARTS ONLY ON COMPRESSOR

BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.

OMCAN INC.

Telephone: 1-800-465-0234

Fax: (905) 607-0234

Email: sales@omcan.com

Website: www.omcan.com



60

Follow us to keep up to date with the latest news and offers



2015.E.O.E